



Date:
Type:
Project:



SIAC - WALL MOUNT

DESCRIPTION:

SIAC is a fabricated aluminum semi-cylindrical fixture, with continuously welded corners.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
SIAC-1000	1000	36W LED (Max)	4680	3000K	UNV	120-277V	WM	Wall Mount
SIAC-2000	2000	60W LED (Max)	7800	4000K	HLV	347-480V	YM	Yoke Mount
SIAC-2500	2500	108W LED (Max)	14040	5000K				
SIAC-3000	3000	144W LED (Max)	18720					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CPL	Clear Polycarbonate Lens (Std)	UP	Indirect Up Light (Std)	WL	Wet Location	BL	Black	
CG	Clear Glass Lens	DN	Direct Down Light	DM	0-10V Dimming	WH	White	
FG	Frosted Glass Lens			DM1	1% Dimming	SG	Silver Grey	
PR	Prismatic Lens (K12)			RB	Remote Ballast/Driver	BZ	Bronze	
				AEL	Automatic Quartz Restrike	NAT	Natatorium	
				VS	Visor Cutoff			
				SV	Swivel Canopy			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

SIAC - _ _ _ _ _

Customization Notes:


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

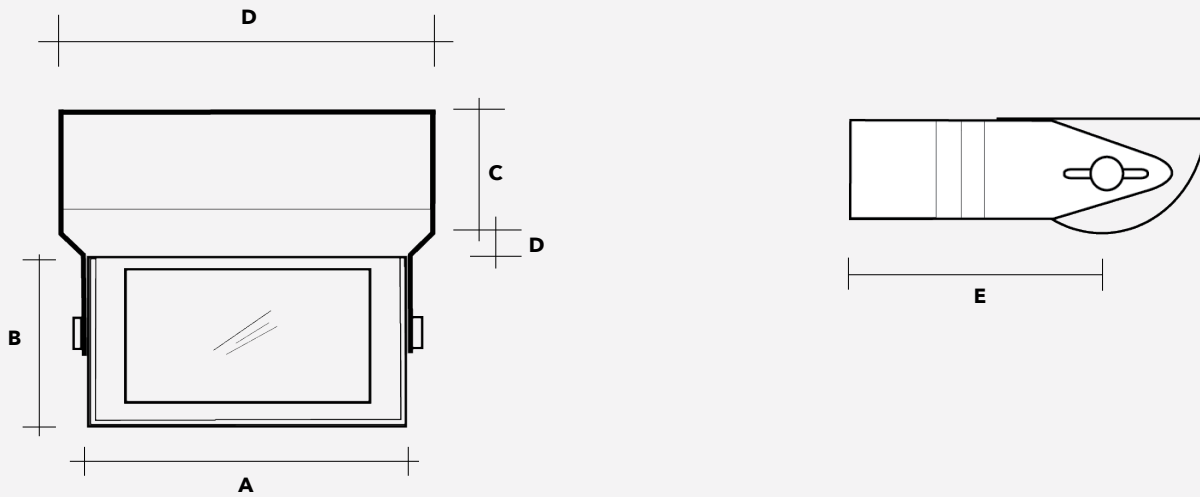

SIAC	A	B	C	D	E
1000	12"	6"	5"	14"	10"
2000	15"	10"	4"	17 3/4"	11 1/2"
2500	18"	10"	5 3/16"	20"	14"
3000	23 1/4"	11"	5 3/16"	26 1/2"	14"

Polar Graph

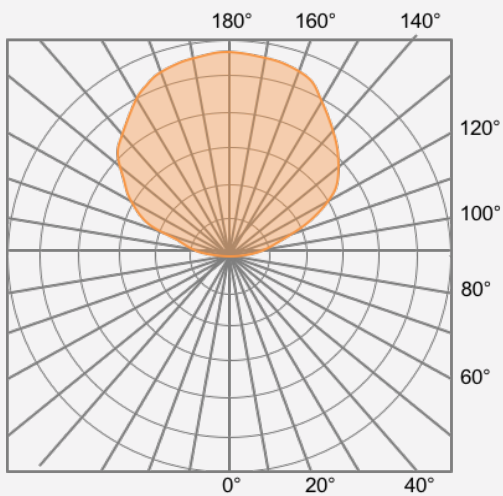

Indirect Up Light