




Date:
Type:
Project:



SMRT - WALL MOUNT

DESCRIPTION:

Die cast aluminum housing full face or a variety of guard options.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
SMRT	24 LED (Max)	3120	3000K	UNV	120-277V	WM	Wall Mount
	50MH		4000K	HLV	347-480V		
	50HPS		5000K	TT	Tri-Tap (TT)		
	CFL57			MT	Multi-Tap (MT)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
FG	Frosted Glass (Std)	F	Front Light	ELB	Electronic HID Ballast	BL	Black
OPL	Opal Polycarbonate Lens			SF	Single Fuse	WH	White
				TP	Tamperproof Hardware	SG	Silver Grey
				TS	Tamperproof Screwdriver	BZ	Bronze
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT




Std - Standard Offering

SMRT-WM- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

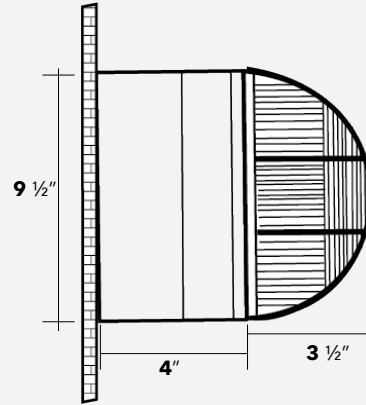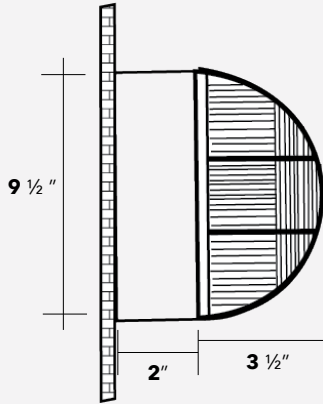

Polar Graph

Front Light

