



Date
Quote #
Project Name
Type



SMSL- Recessed

Description:

SMSL is a cast aluminum luminaire with a face plate. Choose between 2 styles: FF (full face) or HF (hooded face). All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SMSL-FF	10W LED (Max)	985	3000K	UNV 120-277V
SMSL-HF	MR16		3500K	HLV 347-480V
			4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom



Mounting	Lens	Light Pattern	Options	Finishes
RTC Recessed in concrete	CG Clear glass lens (Std)	FF Full face	SD Step dimming	BL Black
	CPL Clear polycarbonate lens	HF Hood face	MS Motion sensor	WH White
			SF Single fuse	SG Silver Grey
			TP Tamperproof hardware	BZ Bronze
			TS Tamperproof screws	

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:

Please note that drawings are not to scale.

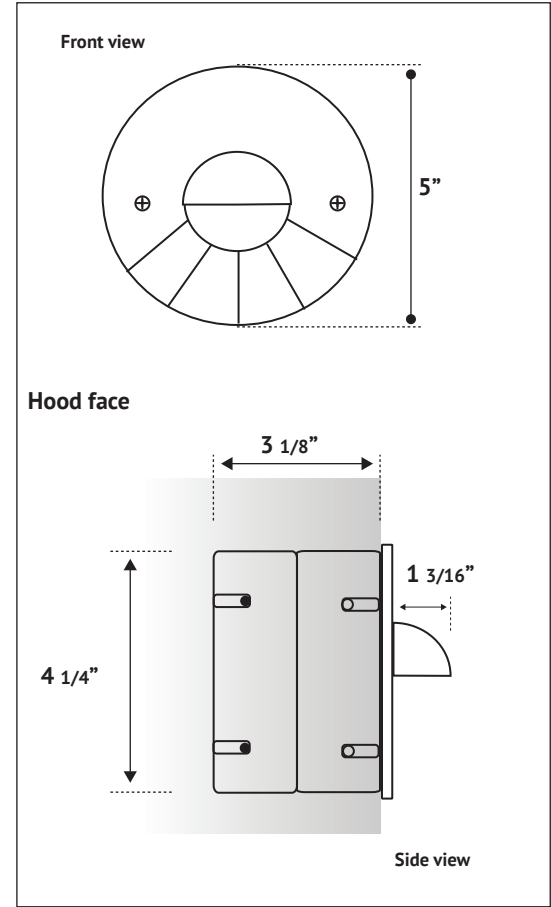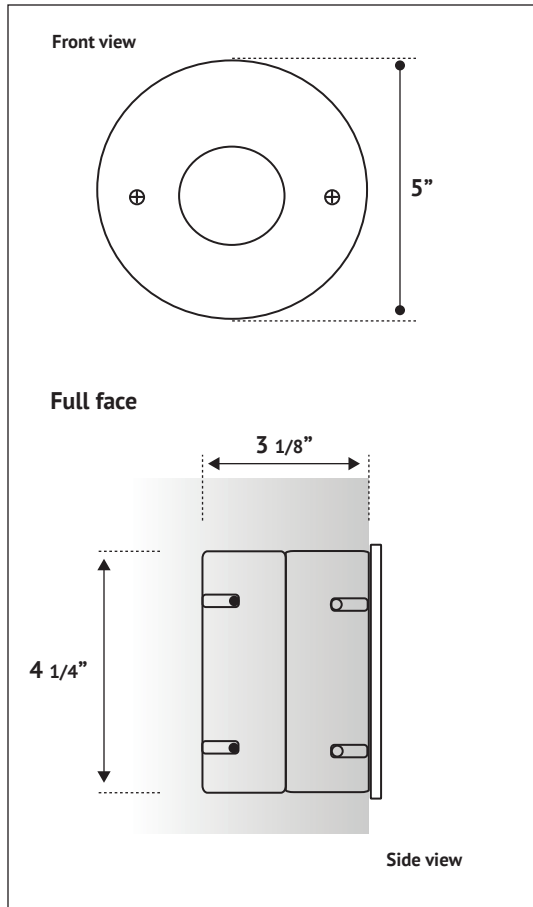

Listing:

Complies to CSA and UL standards.

Polar Graph:

