

<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



### SP700 - PENDANT

**DESCRIPTION:**

The SP700 series is designed for modern indoor spaces. This simple yet aesthetically pleasing can be specified with 3 decorative bars on fixture housing.

Name	Lamping	Lumens ▼	Color Temp	Electrical		Mounting	
SP700	36W LED (Max)	5061	3000K	UNV	120-277V	3AC48	3 Aircraft Cables Converge to Canopy
	2CFL26		4000K	HLV	347-480V	P24	24" Pendant Stem
	39MH-T4		5000K	TT	Tri-Tap (HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				*Contact for other lengths

Lens		Light Pattern		Options		Finishes	
O	Open Bottom	D	Down Light (Std)	DM	0-10V Dimming	BL	Black
EN	Enclosed Lens	UD	Up and Down Light	DM1	1% Dimming	WH	White
PR	Prismatic Lens (K12)			EM	Emergency Battery	SG	Silver Grey
				SF	Single Fuse	BZ	Bronze
				DC	Dust Cover		
				703	3 Aluminum Deco Bars		
				703-C	3 Acrylic Deco Bars		
							*See finishes info on website

✦ Lumens are based on Max Wattage and 5000K CCT

▼ Lumens are for Down Light only.


Std - Standard Offering

SP700- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_


**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

### Dimensions & Mounting (drawings are not to scale)

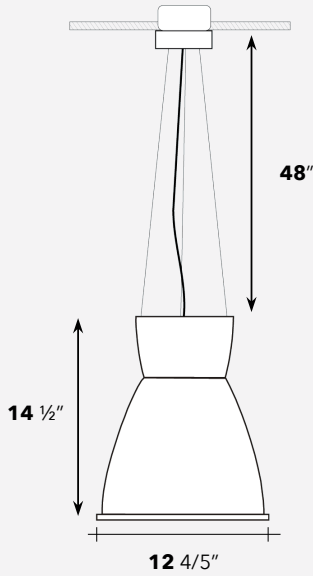


3AC48

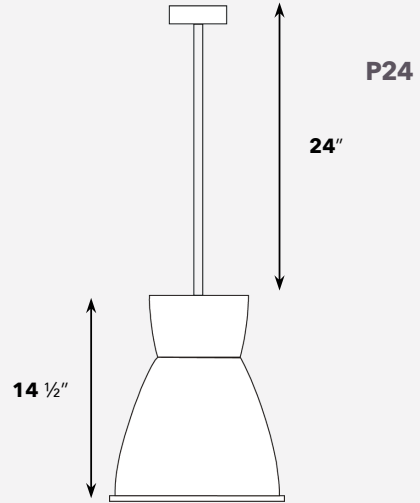

703 (Aluminum) or  
703-C (Acrylic)



### Polar Graph

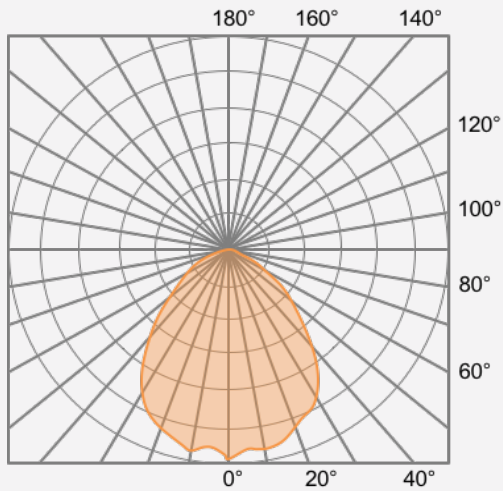

Down Light