



Date
Quote #
Project Name
Type



SRB6F & SRB8F- Bollard

Description:

Cast aluminum bollard with several head assemblies.
HBD (cast aluminum louvers) is standard. Other head assemblies include:

- DCR - Double cone reflector
- ILO - Internal louvers
- PRF - Prismatic refractor

Specify CONC for concrete shaft.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SRB6F	6F 36 LED (Max) 70 MH 42PLT	4672	3000K	UNV 120-277V
SRB8F	8F 48 LED (Max) 100 MH 42PLT 30 LPS	6240	3500K 4000K 5000K	HLV 347-480V TT Tri-Tap (HID) MT Multi-Tap (HID)

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchor, bolts & template	Type of lens varies according to head assembly. HBD head assembly comes with CPL (clear polycarbonate lens) DCR, ILO & PRF head assemblies come with CG (clear glass lens) For better illustration of head assemblies see {page 2}	TY5 Type V (Std) TY3 Type III (certain head assemblies) 180 180 degree (certain head assemblies)	MS Motion sensor SD Step dimming TP Tamperproof hardware TS Tamperproof screws PC Button photocell SF Single fuse GFR Ground fault receptacle	BL Black WH White SG Silver Grey BZ Bronze CONC Concrete (shaft only) CC Custom Color See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

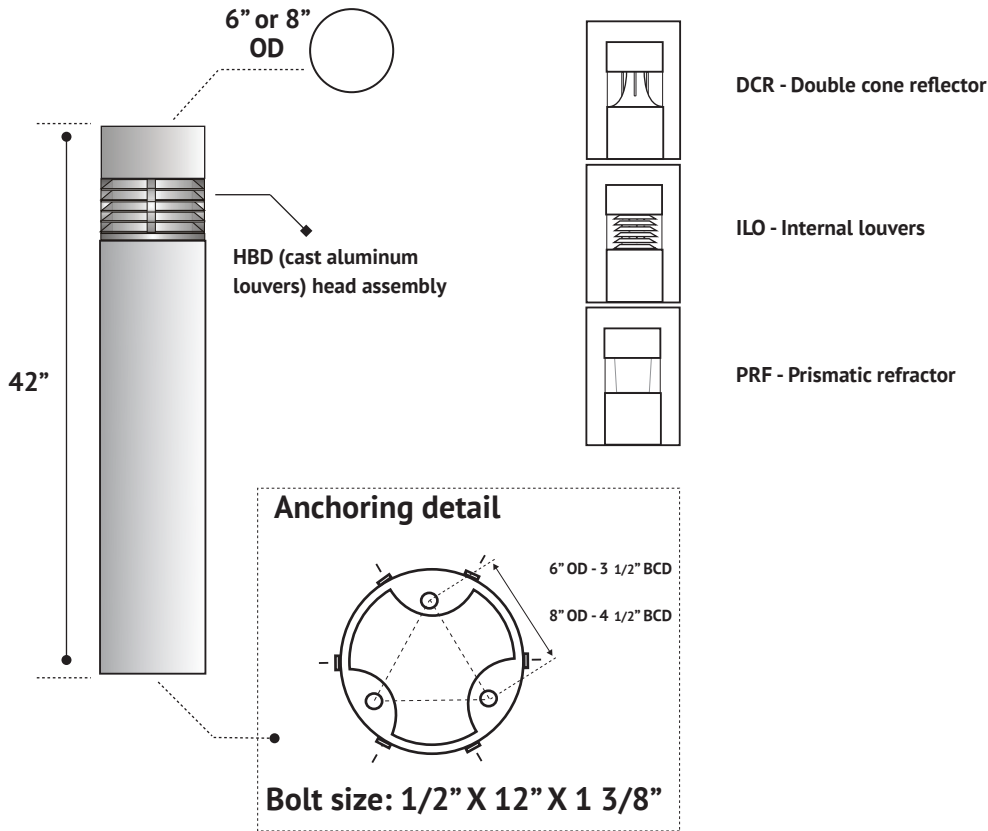

Listing:

Complies to CSA and UL standards.

Polar Graph:

