

<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**SRB8X - BOLLARD**

**DESCRIPTION:**

Bollard with rounded top and deco bars providing ample symmetrical light patterns for walkways and pathways.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
SRB8X	48 LED (Max)	6930	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
	70HPS		4000K	HLV	347-480V		
	100MH		5000K	TT	Tri-Tap (HID)		
	18LPS			MT	Multi-Tap (HID)		
	PLT42						
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OAL	Opal Acrylic Lens	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black
OPL	Opal Polycarbonate Lens	TY3	Type III	TS	Tamperproof Screwdriver	WH	White
				DM	0-10V Dimming	SG	Silver Grey
				PC	Button Photocell	BZ	Bronze
				SF	Single Fuse		
				HCO	House Side Cutoff		
				GFR	Ground Fault Receptacle		
				ELB	Electronic HID Ballast		
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

SRB8X - \_\_\_\_\_

**Customization Notes:**

→ Info on this spec sheet will change without notice as product development is an ongoing process.

### Dimensions & Mounting (drawings are not to scale)

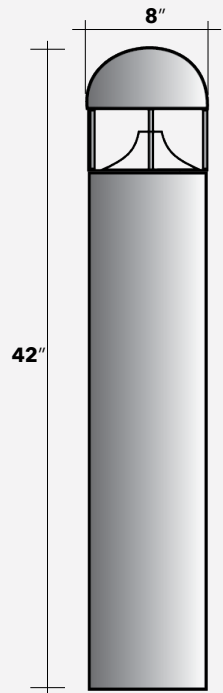

### Polar Graph

