



Date:
Type:
Project:



SRBC - CEILING MOUNT

DESCRIPTION:

SRBC is a pendant mounted cylinder made of heavy duty corrosion resistant extruded aluminum housing with a cast aluminum door frame.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
SRBC	6X12	18W LED (Max)	2378	3000K	UNV	120-277V	CM	Ceiling Mount
	6X15	29W LED (Max)	3235	4000K	HLV	347-480V		
	8X15	50W LED (Max)	7306	5000K				
	8X18	50W LED (Max)	7306					
	13X20	72W LED (Max)	9795					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
O	Open Bottom	NB	Wide Beam	DM	0-10V Dimming	BL	Black	
CG	Clear Glass Lens	MB	Narrow Beam	IP65	IP65 Rated Enclosure	WH	White	
FG	Frosted Glass Lens	WB	Wide Beam	RB	Remote Ballast/Driver	SG	Silver Grey	
PG	Prismatic Glass Lens					BZ	Bronze	
MB	Milligrove Baffle					CH	Chrome	
HC	Honeycomb Shielding					ANO	Anodized Aluminum	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

SRBC - _ _ _ _ _

Customization Notes:


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting

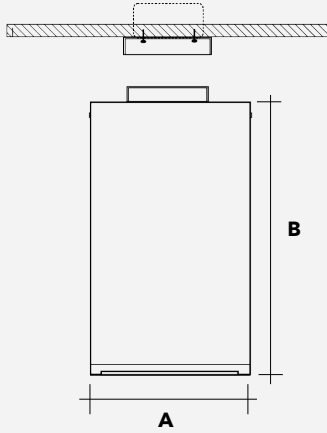

	A	B
SRBC (6X12)	6"	12"
SRBC (6X15)	6"	15"
SRBC (8X16)	8"	15"
SRBC (8X18)	8"	18"
SRBC (13X20)	13"	20"

Polar Graph

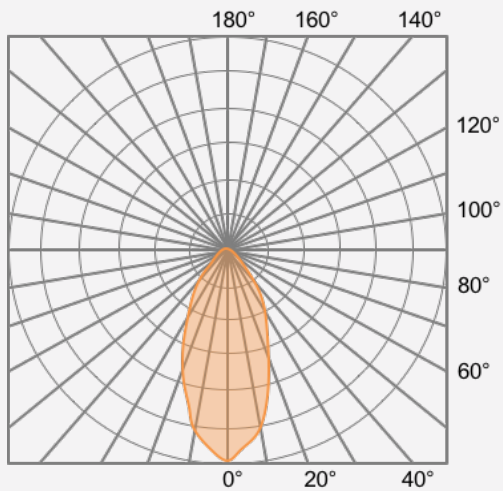

Medium Beam