



Date:
Type:
Project:



SRBK - WALL MOUNT

DESCRIPTION:

SRBK is a surface mounted cylinder available with different beam spreads. Either down or Up light can be specified.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
SRBK-6-15	6X15	20W LED (Max) PLT42 70 MH 70 HPS	2131	3000K	UNV	120-277V	WM	Wall Mount
SRBK-8-15				4000K	HLV	347-480V		
SRBK-8-18				5000K	TT	Tri-Tap (HID)		
	8X15	40W LED (Max) 100 MH PLT57	5750		MT	Multi-Tap (HID)		
	8X18	58W LED (Max) 175 MH	7445					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CG	Clear Glass Lens	NB	Narrow Beam (Down or Up)	DM	0-10V Dimming	BL	Black	
FG	Frosted Glass Lens	MB	Medium Beam (Down or Up)	IP65	IP65 Rated Enclosure	WH	White	
PG	Prismatic Glass Lens	WB	Wide Beam (Down or Up)	AEL	Quartz Restrike (Relay)	SG	Silver Grey	
				MEL	Quartz Restrike (No Relay)	BZ	Bronze	
				PC	Button Photocell	CH	Chrome	
						ANO	Anodized Aluminum	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



SRBK- _____

Customization Notes:

*** Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)

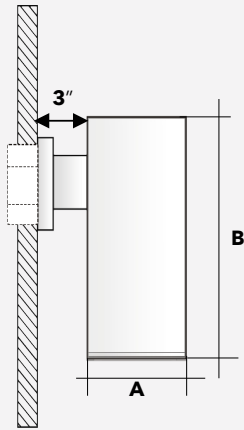

	A	B
SRBK (6X15)	6"	15"
SRBK (8X15)	8"	15"
SRBK (8X18)	8"	18"

Polar Graph

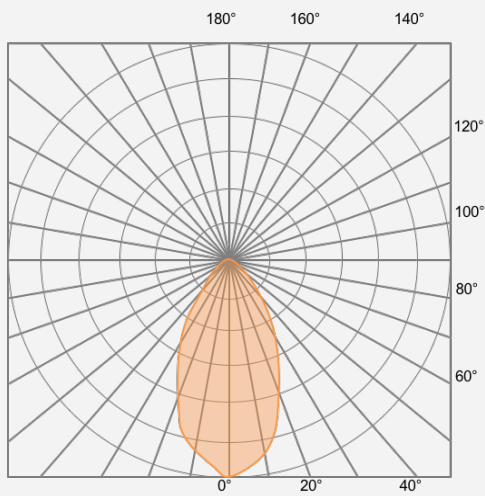

Wide Beam