



Date:
Type:
Project:



SRBP-O - PENDANT

DESCRIPTION:

Opal cylindrical lens with aluminum housing construction. External hardware is made of stainless steel.

Name	Lamping		Lumens ▼	Color Temp	Electrical		Mounting	
	Size	Wattage			UNV	Voltage	Mounting	Notes
SRBP-O-2	2" X 12"	1W LED (Max)	176	3000K	UNV	120-277V	AC36	36" Aircraft Cable
SRBP-O-4	4" X 20"	9W LED (Max)	1259	4000K	HLV	347-480V	P24	24" Pendant Stem
SRBP-O-6	6" X 24"	30W LED (Max)	5280	5000K			CLU	Cluster Mount ❖
SRBP-O-8	8" X 30"	42W LED (Max)	7392					
SRBP-O-10	10" X 48"	60W LED (Max)	10560					
	<i>RGB Available</i>							
	*Contact for other wattages		*Contact for custom	*Specify other				*Contact for other lengths

Lens		Light Pattern		Options		Finishes		
OAL	Opal Acrylic Lens	EG	Encompassing Glow (Std)	DM	0-10V Dimming	BL	Black	
		EG & D	Encompassing Glow + Down Light	DM1	1% Dimming	WH	White	
				EM	Emergency Battery	SG	Silver Grey	
				RB	Remote ballast/driver	BZ	Bronze	
							*See finishes info on website	

❖ Lumens are based on Max Wattage and 5000K CCT

▼ Lumens are for Encompassing Glow Light Pattern and does not include down light

❖ Contact for cluster mount configurations


Std - Standard Offering

SRBP-O- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


Customization Notes:

▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

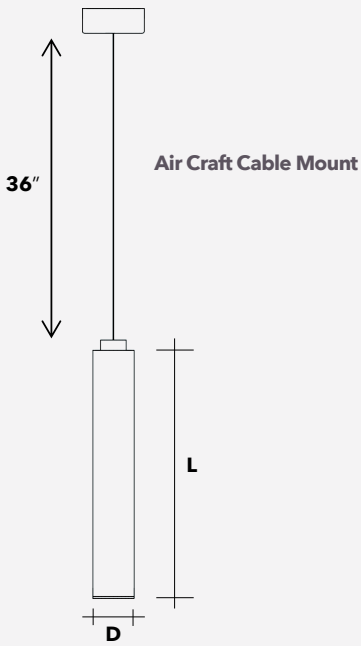

Pendant Stem Mount




Cluster Mount (Contact for more info)

SRBP-O	D	L
SRBP-O-2	2"	12"
SRBP-O-4	4"	20"
SRBP-O-6	6"	24"
SRBP-O-8	8"	30"
SRBP-O-10	10"	48"
Contact for custom dimensions		

Polar Graph

Encompassing Glow

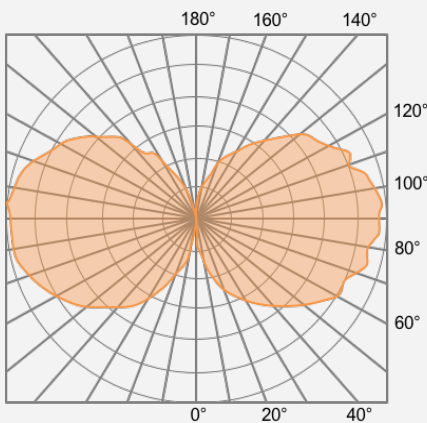

Encompassing Glow & Down Light

