



Date:
Type:
Project:



SRBP - CEILING MOUNT

DESCRIPTION:

SRBP is a pendant mounted cylinder made of heavy duty corrosion resistant extruded aluminum housing with a cast aluminum door frame.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
SRBP	6X12	18W LED (Max)	2378	3000K	UNV	120-277V	P24	24" Pendant Stem
	6X15	29W LED (Max)	3235	4000K	HLV	347-480V	AC24	24" Aircraft Cable
	8X15	50W LED (Max)	7306	5000K			3C	Hook with 3' Electrical Cord
	8X18	50W LED (Max)	7306				3CP	3' Chain with Electrical Cord
	13X20	72W LED (Max)	9795					
	*Contact for other wattages		*Contact for custom	*Specify other			*Contact for other lengths	

Lens		Light Pattern		Options		Finishes		
O	Open Bottom	NB	Narrow Beam	DM	0-10V Dimming	BL	Black	
CG	Clear Glass Lens	MB	Medium Beam	IP65	IP65 Rated Enclosure	WH	White	
FG	Frosted Glass Lens	WB	Wide Beam	RB	Remote Ballast/Driver	SG	Silver Grey	
PG	Prismatic Glass Lens					BZ	Bronze	
MB	Milligrove Baffle					CH	Chrome	
HC	Honeycomb Shielding					ANO	Anodized Aluminum	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


SRBP - _ _ _ _ _

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

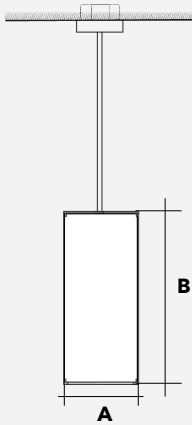

	A	B
SRBP (6X12)	6"	12"
SRBP (6X15)	6"	15"
SRBP (8X16)	8"	15"
SRBP (8X18)	8"	18"
SRBP (13X20)	13"	20"



Polar Graph

