



Date
Quote #
Project Name
Type



SRBT - Bollard

Description:

Constructed of a one piece fabricated aluminum shaft and silicone sealed linear prismatic lens (Std).
Lens frame is secured with flush screws. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SRBT	42 LED (Max)	5460	3000K	UNV 120-277V
	70 HPS		3500K	HLV 347-480V
	70 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchors, bolts and template	LPL	Linear prismatic lens (Std)	FT	Forward throw	TP	Tamperproof hardware	BL	Black
		PR	Prismatic lens (K12)			TS	Tamperproof screws	WH	White
								SG	Silver Grey
		LE	Lexan (vandal resistant)			PC	Button photocell	BZ	Bronze
								CC	Custom Color
		BC	Base Cover			See website for custom colors. Contact factory for physical samples.			
		GFR	Ground fault receptacle						
		ELB	Electronic HID ballast						


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

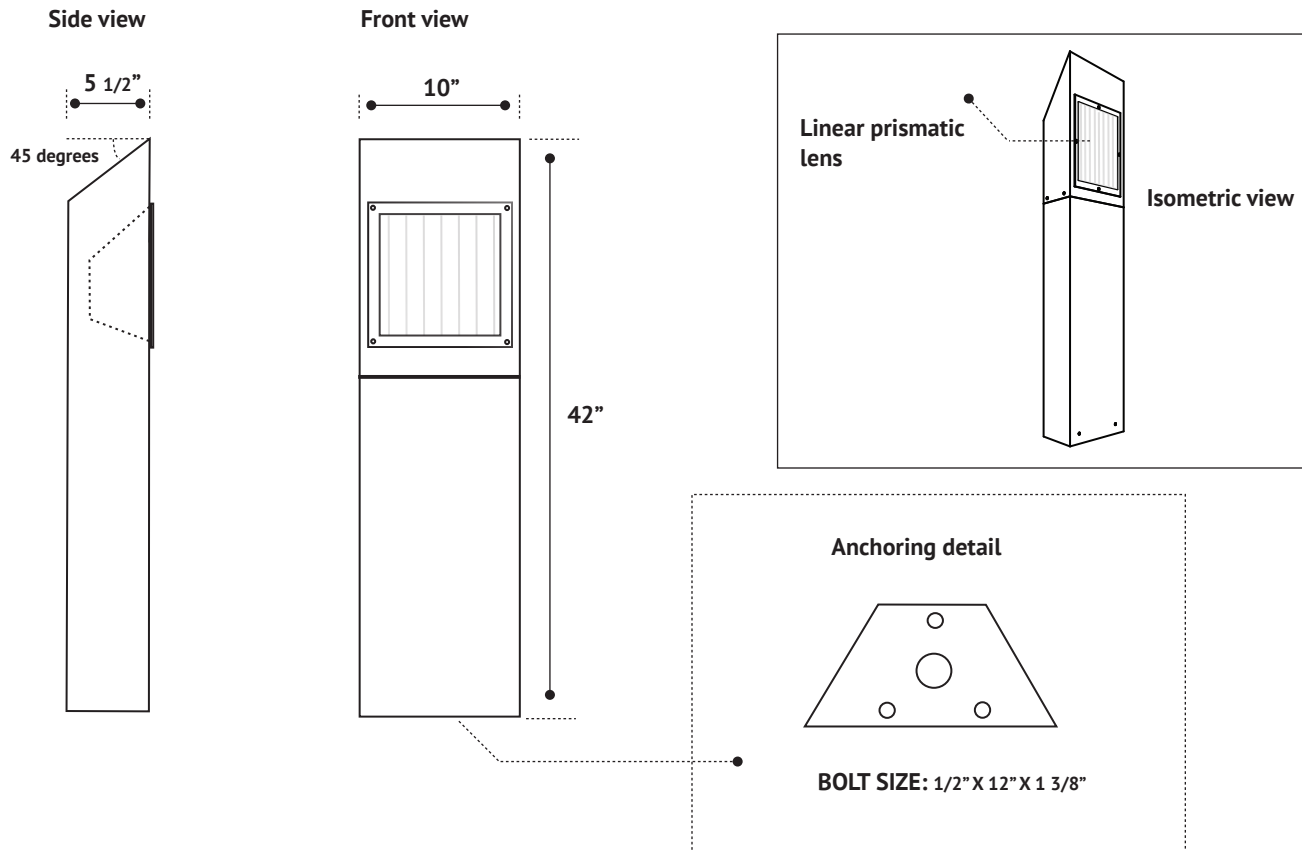

Listing:

Complies to CSA and UL standards.

Polar Graph:

