



Date:
Type:
Project:



SRBT - BOLLARD

DESCRIPTION:

The housing is constructed of heavy duty Fabricated aluminum.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
SRBT	42 LED (Max)	5460	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
	70HPS		4000K	HLV	347-480V		
	70MH		5000K	TT	Tri-Tap (HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
LPL	Linear Prismatic Lens (Std)	FT	Forward Throw	TP	Tamperproof Hardware	BL	Black
FG	Frosted Glass Lens			TS	Tamperproof Screwdriver	WH	White
				DM	0-10V Dimming	SG	Silver Grey
				PC	Button Photocell	BZ	Bronze
				SF	Single Fuse		
				HCO	House Side Cutoff		
				GFR	Ground Fault Receptacle		
				ELB	Electronic HID Ballast		
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



SRBT - _____

Customization Notes:


*** Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

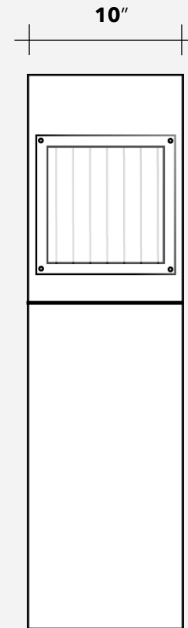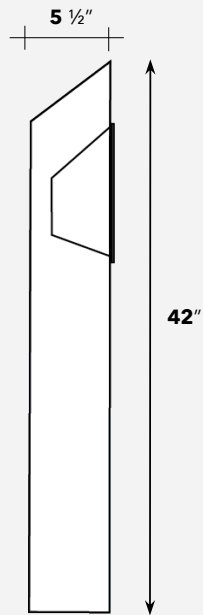

Polar Graph

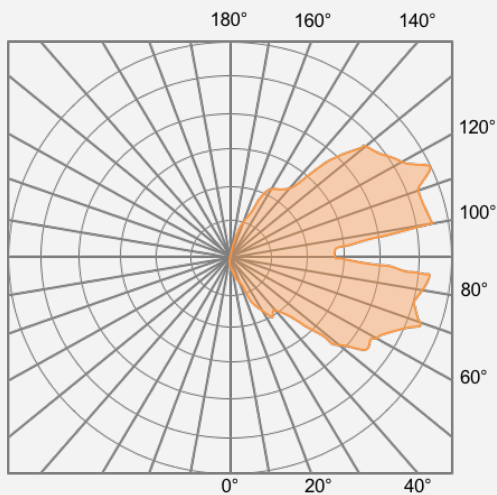

Forward Throw