



<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**SSL-30 - RECESSED**

**DESCRIPTION:**

Cast aluminum housing construction. Red, Green and Blue LEDs available.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
SSL-30	3W LED (Max)	422	3000K	UNV	120-277V	R	Recessed in dry wall
			4000K	HLV	347-480V	RTC	Recessed in concrete
	Red, Green or Blue LEDs		5000K				
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CPL	Clear Polycarbonate Lens (Std)	FT	Forward Throw	DM	0-10V Dimming	BL	Black	
OPL	Opal Polycarbonate Lens			WL	Wet Location	WH	White	
				TP	Tamperproof Hardware	SG	Silver Grey	
				TS	Tamperproof Screwdriver	BZ	Bronze	
				IP65	Rated Enclosure			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



SSL-30- \_\_\_\_\_

**Customization Notes:**


➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.



### Dimensions & Mounting (drawings are not to scale)

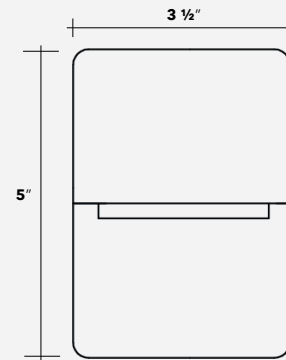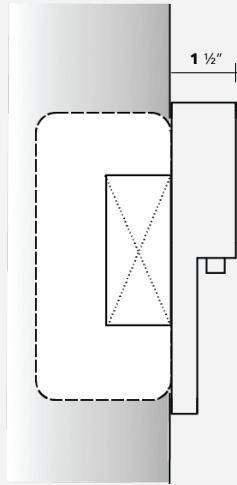

### Polar Graph

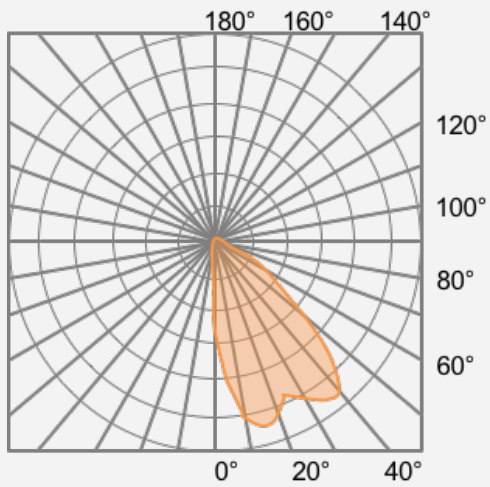

Forward Throw