



| |
|--------------|
| Date |
| Quote # |
| Project Name |
| Type |



SSQB-4B - Bollard

Description:

Constructed of extruded aluminum. Cylindrical opal acrylic lens is standard, the lens is covered by 4 bars. Light is emitted in pie shaped quadrants due to the placement of the aluminum bars. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

| Name | Light Engine | Source Lumens(LED) | Color Temp | Electrical |
|------------|--------------|--------------------|-------------------------|--------------|
| SSQB-4B-38 | 38 | 7W LED (Max) | 3000K | UNV 120-277V |
| SSQB-4B-60 | 60 | 18W LED (Max) | 3500K 4000K 5000K | HLV 347-480V |

Contact for custom

Contact for custom

Contact for custom

| Mounting | | Lens | | Light Pattern | | Options | | Finishes | |
|----------|--------------------------|------|-------------------------|---------------|--------------|---------|---------------------------------|----------|--|
| ABT | Anchor, bolts & template | OAL | Opal acrylic lens (Std) | TY5 | Type V (Std) | TP | Tamperproof hardware | Standard | |
| | | | | | | TS | Tamperproof screws | BL | Black |
| | | | | | | PC | Button photocell | WH | White |
| | | | | | | PERF | Perferated insert (inside lens) | SG | Silver Grey |
| | | | | | | SF | Single fuse | BZ | Bronze |
| | | | | | | | | Custom | |
| | | | | | | | | CC | Custom Color |
| | | | | | | | | | See website for custom colors. Contact factory for physical samples. |


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

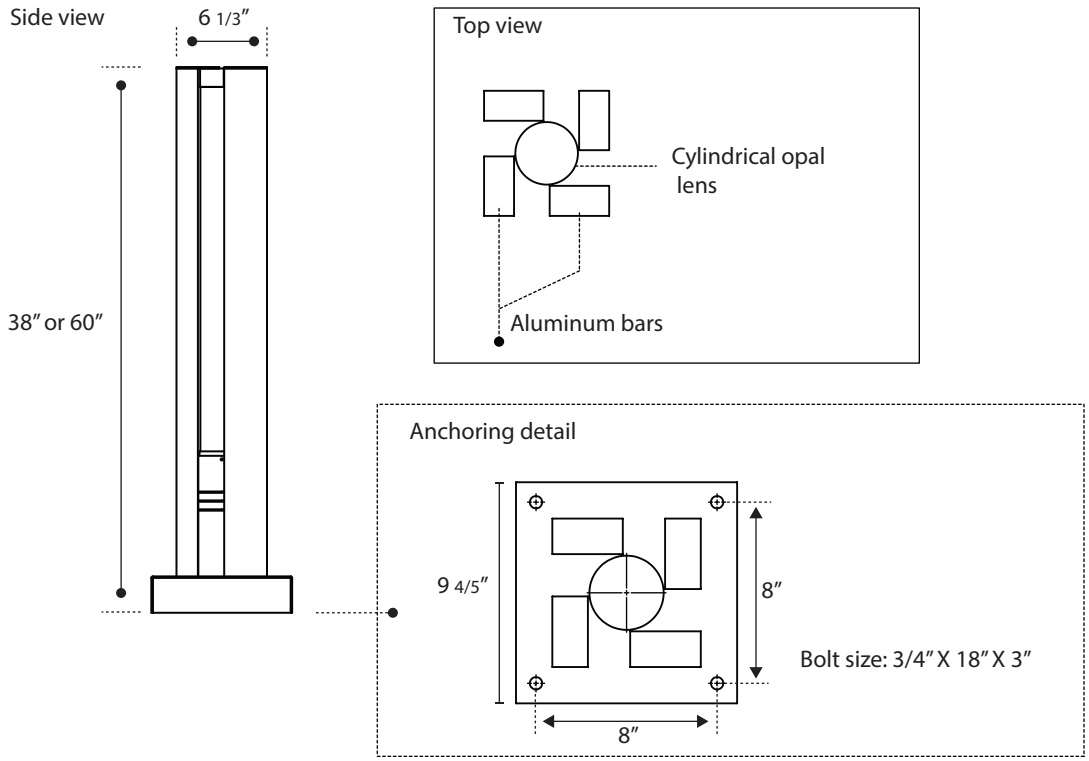

Listing:

Complies to CSA and UL standards.

Polar Graph:

