



Date:
Type:
Project:



SSQB - BOLLARD

DESCRIPTION:

Die-cast aluminum housing. Hinged door cover. Clear lens is standard. Silicone gasketed lens for uncompromised outdoor performance. All external hardware is stainless steel.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
SSQB-6	6	20W LED (Max)	2814	3000K	UNV	120-277V	ABT	Anchor, Bolts & Template
SSQB-8	8	36W LED (Max)	4527	4000K	HLV	347-480V		
				5000K				
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CPL	Clear Polycarbonate Lens (Std)	TY5	Type V (Std)	SF	Single Fuse	BL	Black	
CG	Clear Glass Lens	TY3	Type III	GFR	Ground Fault Receptacle	WH	White	
PG	Prismatic Glass Lens			TP	Tamperproof Hardware	SG	Silver Grey	
				PC	Button Photocell	BZ	Bronze	
				DM	0-10V Dimming			
				DM1	1% Dimming			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT



Std - Standard Offering

SSQB- _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

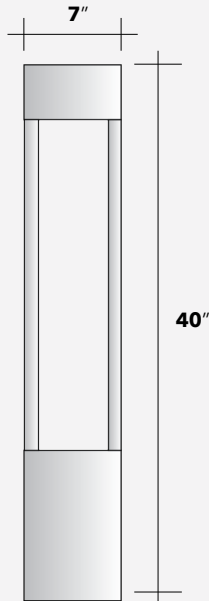

Polar Graph

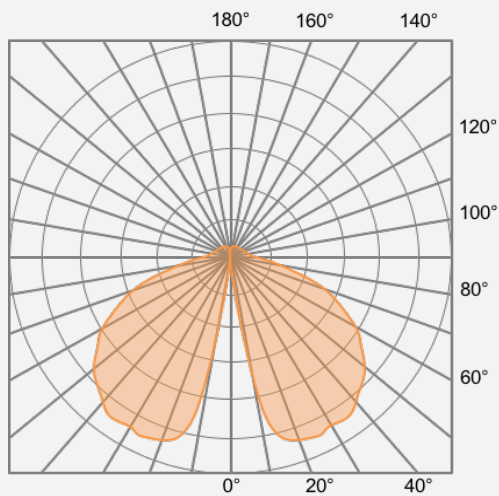

TYPE V