




<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

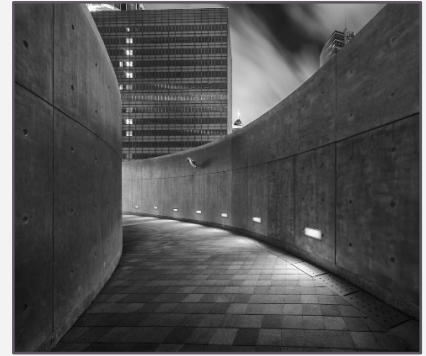

## STEP LIGHTS - RECESSED

### DESCRIPTION:

Corrosion resistant aluminum housing with cast die aluminum with a variety of face plate design.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
SCSL	12 LED (Max)	1560	3000K	UNV	120-277V	R	Recessed in drywall
SFSL	50MH		4000K	HLV	347-480V	RTC	Recessed in Concrete
SGSL	CFL32		5000K	TT	Tri-Tap (TT)		
SBSL				MT	Multi-Tap (MT)		
SLSL							
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
OPL	Opal Polycarbonate Lens (Std)	F	Front Light	TP	Tamperproof Hardware	BL	Black	
FG	Frosted Glass Lens			SF	Single Fuse	WH	White	
CG	Clear Glass Lens			EM	Emergency Battery	SG	Silver Grey	
				DF	Double Face	BZ	Bronze	
				RB	Remote Ballast/Driver			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

STEP LIGHTS- \_\_\_\_\_

### Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

### Dimensions & Mounting (drawings are not to scale)

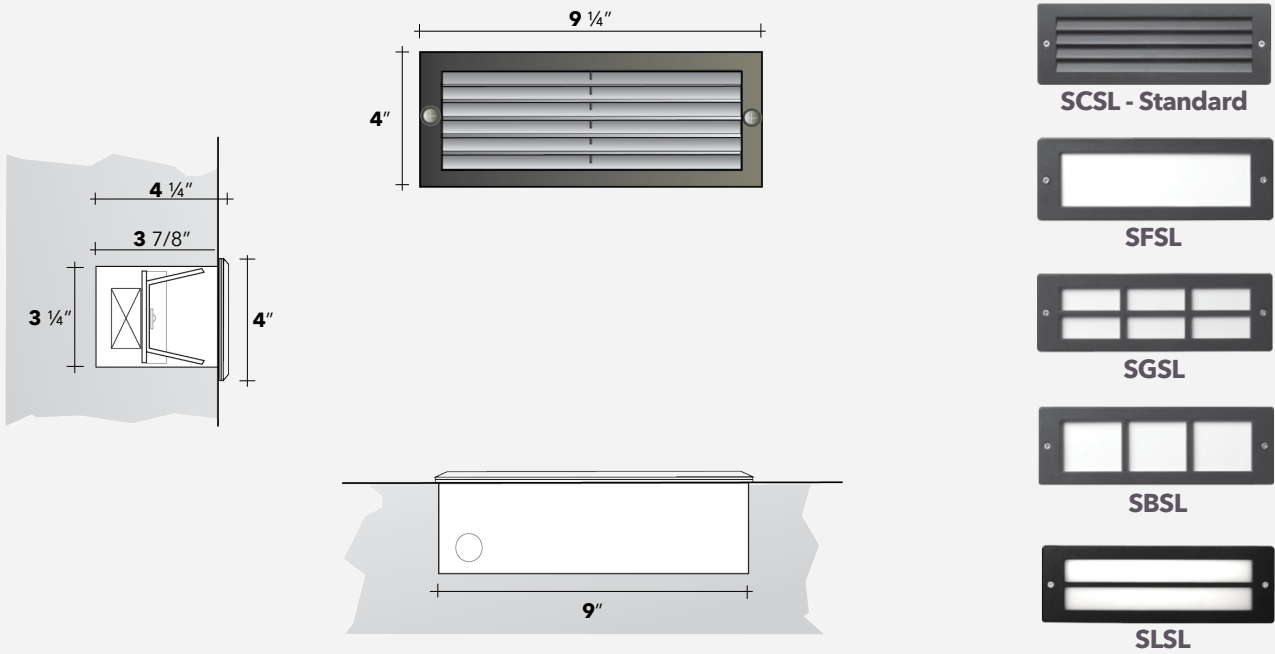

### Polar Graph

