



Date
Quote #
Project Name
Type



## TIKO - Light Column

### Description:

Triangular light column constructed of heavy duty extruded aluminum housing construction. Opal acrylic lenses are standard.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
TIKO	60 LED (Max)	10559	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts and template	OAL	Opal acrylic lens	TY5	Type V (Std)	SD	Step dimming	Standard	
						MS	Motion sensor	BL	Black
						TCO	Trespass cut off	WH	White
						EM	Emergency battery	SG	Silver Grey
						TP	Tamperproof hardware	BZ	Bronze
						TS	Tamperproof screws	Custom	
						PC	Button photocell	CC	Custom Color
						GFR	Ground fault receptacle	See website for custom colors. Contact factory for physical samples.	
						COM	Intercom		
						SF	Single fuse		


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

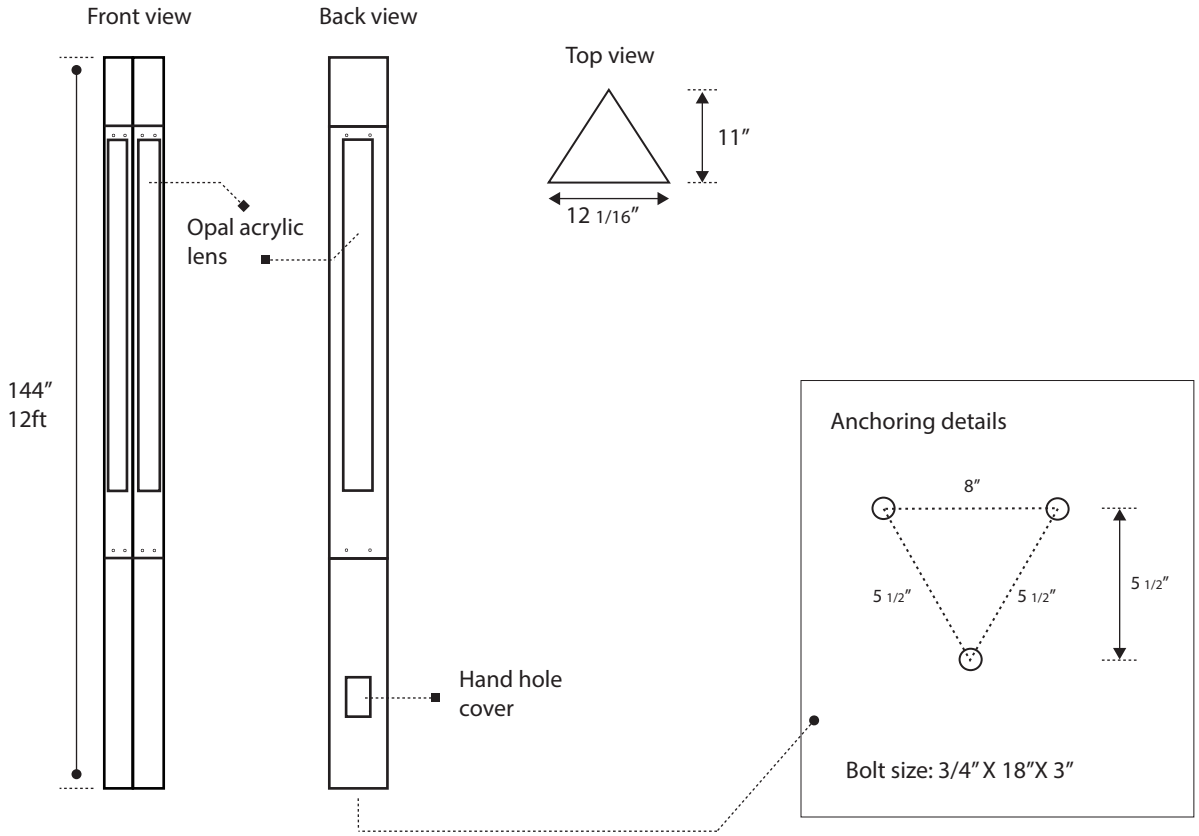

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

