



Date:
Type:
Project:



TIKO - OUTDOOR LIGHT COLUMN

DESCRIPTION:

Heavy duty extruded aluminum (6061-T6 Alum) housing construction with clear acrylic lens.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
TIKO	60 LED (Max)	10559	3000K	UNV	120-277V	ABT	Anchor, Bolts & Template
			4000K	HLV	347-480V		
	Red, Green and Blue LEDs		5000K				
	*Contact for other wattages		*Specify other				

Lens		Light Pattern		Options		Finishes		
CAL	Clear Acrylic Lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black	
OAL	Opal Acrylic Lens			TS	Tamperproof Screwdriver	WH	White	
				PC	Button Photocell	SG	Silver Grey	
				SF	Singe Fuse	BZ	Bronze	
				GFR	Ground Fault Receptacle			
				DM	0-10V Dimming			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT



Std - Standard Offering

TIKO- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

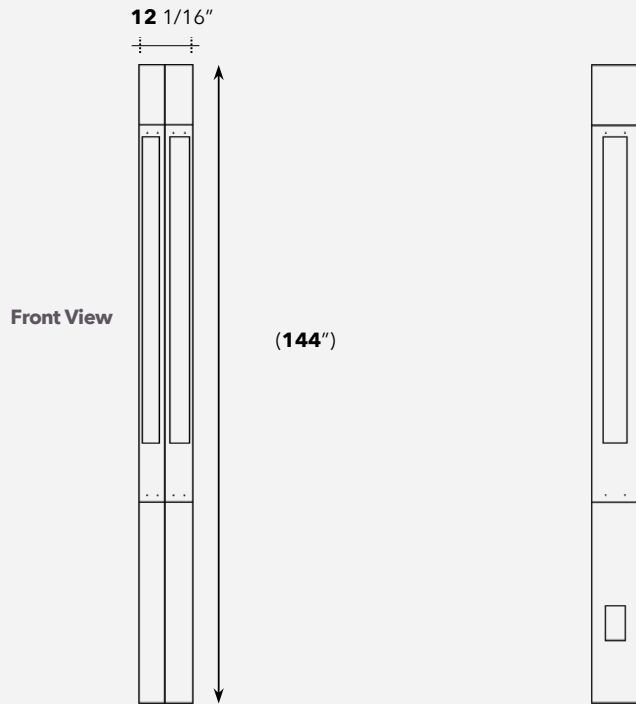


Anchoring Info



HOLES ACCEPT 3/4" DIA. ANCHOR BOLTS

Polar Graph

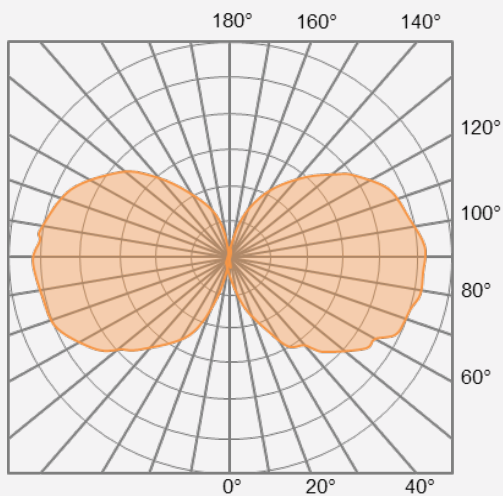

TYPE V