




Date:
Type:
Project:

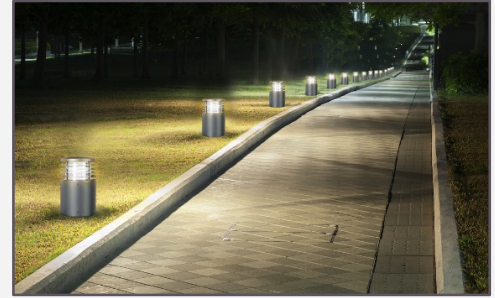

UNB - BOLLARD

DESCRIPTION:

UNB is a round louvered bollard that sits low to the ground.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
UNB	42 LED (Max)	5460	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
	70HPS		4000K	HLV	347-480V		
	70MH		5000K	TT	Tri-Tap (HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CAL	Clear Acrylic Lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black	
OAL	Opal Acrylic Lens	TY3	Type III	TS	Tamperproof Screwdriver	WH	White	
				PC	Button Photocell	SG	Silver Grey	
				SF	Single Fuse	BZ	Bronze	
				HCO	House Side Cutoff			
				GFR	Ground Fault Receptacle			
				ELB	Electronic HID Ballast			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

UNB - _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

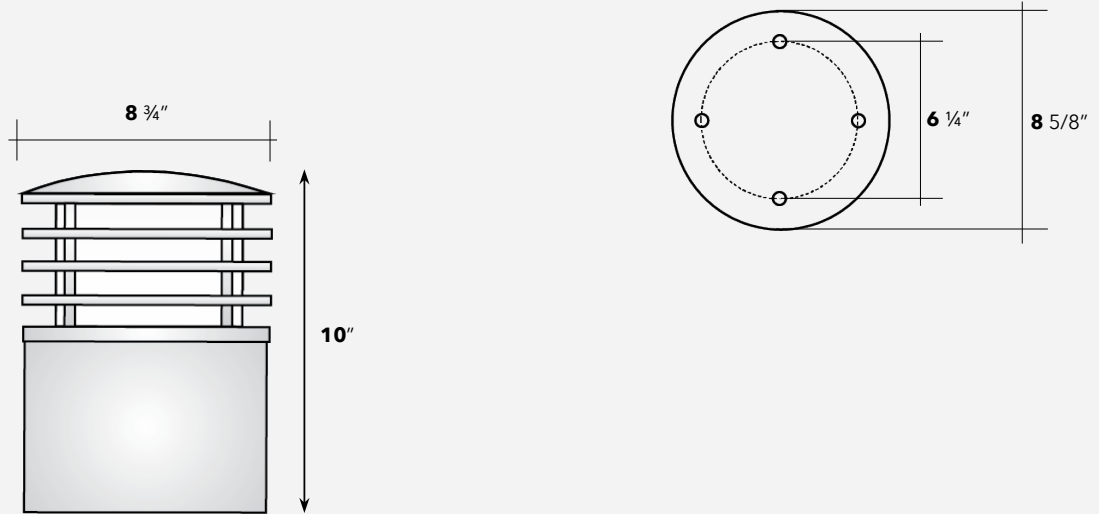

Polar Graph

