



Date
Quote #
Project Name
Type



VENUS - Bollard

Description:

Upper assembly display consists of an hour glass look with curvilinear bars. Silicone sealed lens for weather protection, frosted acrylic is standard. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
VENUS	36W LED (Max)	4680	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts & template	FAL	Frosted acrylic lens (Std)	TY5	Type V (Std)	MS	Motion sensor	BL	Black
		OAL	Opal acrylic lens	TY3	Type III	SD	Step dimming	WH	White
						TP	Tamperproof hardware	SG	Silver Grey
						TS	Tamperproof screws	BZ	Bronze
						PC	Button photocell	CONC	Concrete (shaft only) See [page 2] for better illustration
						GFR	Ground fault receptacle	CC	Custom Color
				180	180 degrees	SF	Single fuse		See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.


Side view

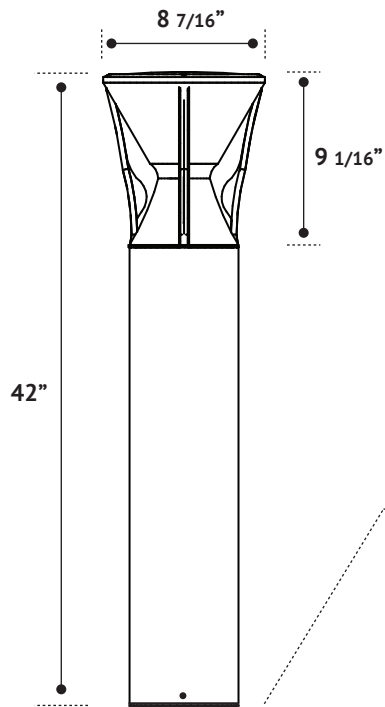


Top view



Anchoring detail

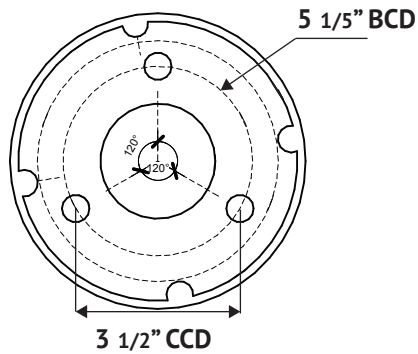

Bolt size: 1/2" X 12" X 1 3/8"

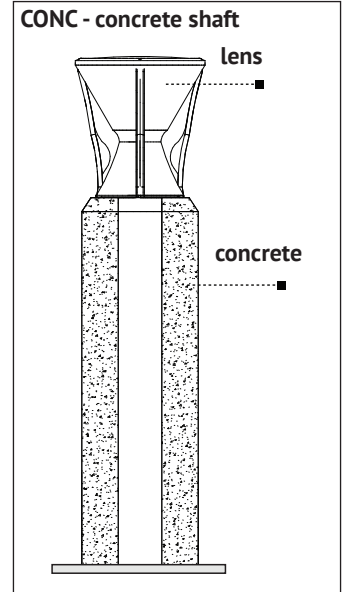

Listing:

Complies to CSA and UL standards.

Polar Graph:

TY5

