



Date
Quote #
Project Name
Type



## WL3 - Wall Mount

### Description:

Wall mount luminaire with cast aluminum housing and a silicone sealed lens for weather protection. Suitable for dark sky applications.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
WL3	48W LED (Max)	6240	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall Mount	CG	Clear glass lens (Std)	D	Down light (Std)	WL	Wet location	Standard	
								BL	Black
		CPL	Clear polycarbonate lens	UD	Up and down light	TP	Tamperproof hardware	WH	White
								SG	Silver Grey
		OPL	Opal polycarbonate lens			TS	Tamperproof screws	BZ	Bronze
				PC	Button photocell				
				SF	Single fuse	Custom			
				RB	Remote ballast/driver	CC	Custom Color		
				DCO	Dark sky cutoff	See website for custom colors. Contact factory for physical samples.			


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






**Dimensions & Mounting:**

Please note that drawings are not to scale.

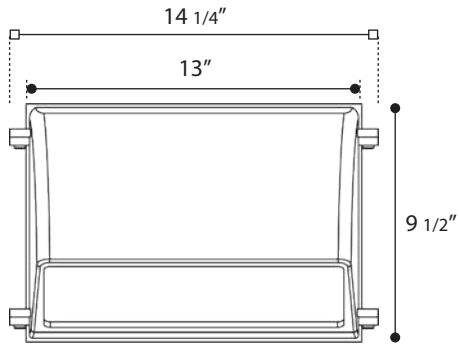


Front view

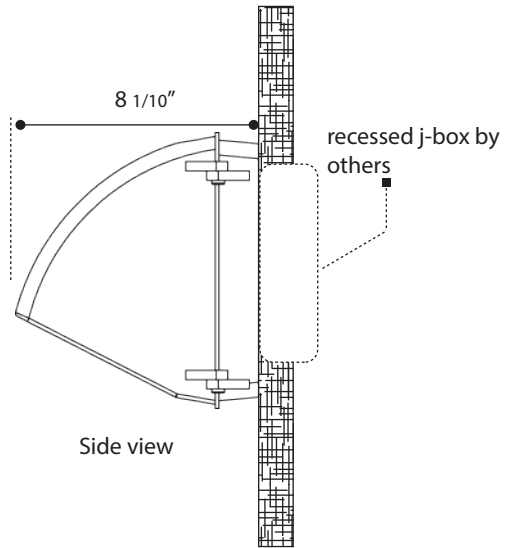

Side view

Isometric view



**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

