

Date:

Type:

Project:

## ARROW

### DESCRIPTION:

Versatile luminaire with a fin design. Fin design dissipates heat away from the LED junction and the lateral airflow keeps the system cool.



Name	Light Engine	Source Lumens ±	Color Temp	Electrical		Mounting	
ARROW II	288W LED (Max)	32454	3000K	UNV	120-277V	ER3	Arm for Round or Square Pole
			4000K	HLV	347-480V	YM	Yoke mount Pendant stem mount (length is nominal)
			5000K			P	
						CM	Ceiling mount
						WM	Wall mount
Contact Solera for other Wattages		Contact for custom	Contact for custom	For better illustration, see Page 2			

Lens		Optics		Options		Finishes	
LPL	Linear Prismatic Lens	TY5	Type V (Std)	SD	Step dimming	BL	Black
CL	Clear Lens	TY4	Type IV	MS	Motion sensor	WH	White
PG	Prismatic Glass Lens	TY3	Type III	TCO	Trespass cut off	SG	Silver Gray
		TY2	Type II	TP	Tamperproof hardware & screws	BZ	Bronze
				PC	Button photocell		
				PCR	Photocell Receptacle		
				EM	Emergency Battery		
				BD	Barn Doors		
				LVR	Internal Louvers		
				SF	Single Fuse		

[See finishes page for custom colors.](#)

± Lumens are based on Max Wattage and 5000K CCT  
Std – Standard Offering

ARROW- \_\_\_\_\_

Customization Notes:







→ Info on this spec sheet will change without notice as product development is an ongoing process.  
Date Modified: April-15-2025

**TOLL FREE: 1.877.765.3722 • FAX: 905.457.1115 • [soleracorp.com](http://soleracorp.com)**

### Dimensions & Mounting:

Please note that drawings are not to scale.

	A	B	C
ARROW-II	26"	14 1/4"	2 7/8"

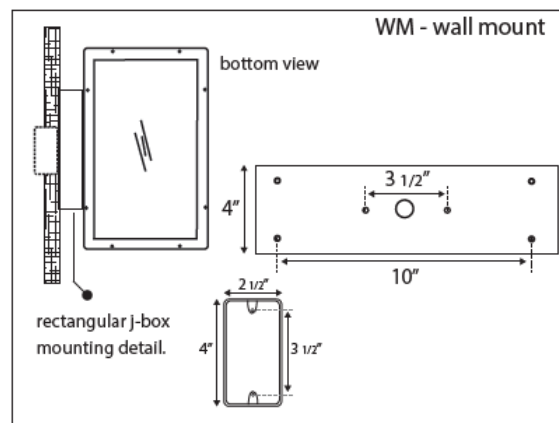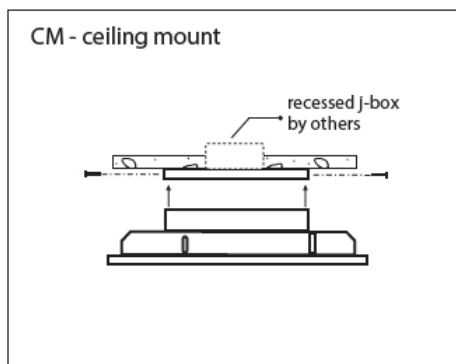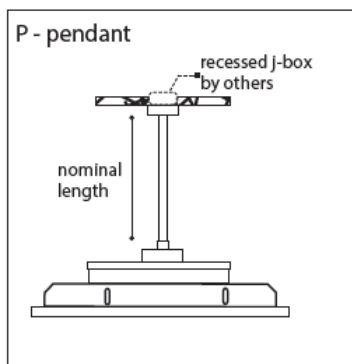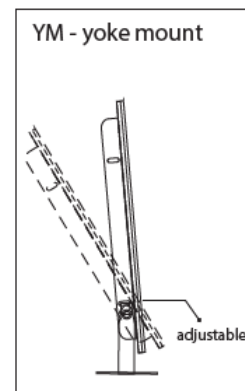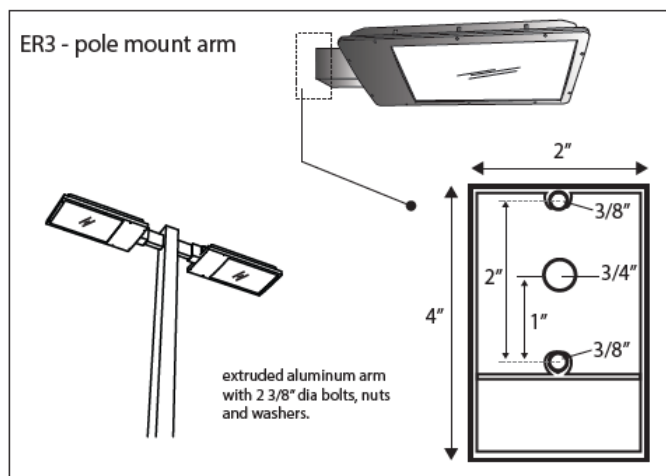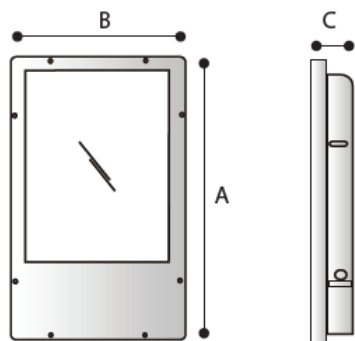


### Listing:


Complies to CSA and UL standards.

### Polar Graph:


TY5



TY4



TY3



TY2

