



Date
Quote #
Project Name
Type



AUR-C - Ceiling Mount

Description:

Cold rolled steel frame with one piece opal polycarbonate lens. All external hardware is stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
AUR-C-14	14 12 LED (Max)	2112	2700K	UNV 120-277V
AUR-C-16	16 20 LED (Max)	3520	3000K	HLV 347-480V
AUR-C-24	24 30 LED (Max)	5280	3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
CM Ceiling mount	OPL Opal polycarbonate lens (Std)	D Down light (Std)	DM 0-10V dimming	Metal Framework Only
			DM1 1% dimming	CRS Cold rolled steel
			SF Single fuse	BL Black
				WH White
				SG Silver Grey
				BZ Bronze

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

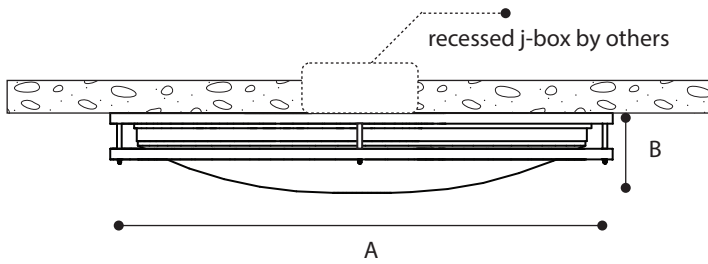

	A	B
AUR-C-14	14"	4"
AUR-C-16	16"	4"
AUR-C-24	24"	4"

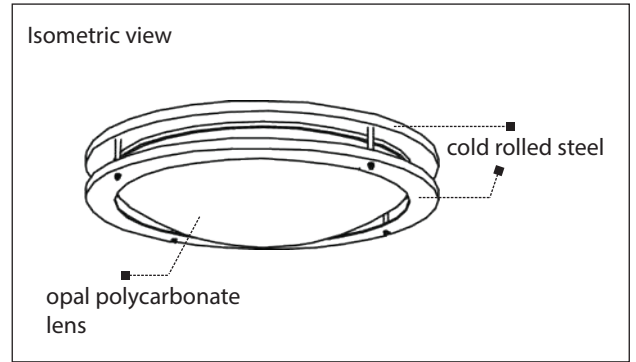

Listing:

Complies to CSA and UL standards.

Polar Graph:

