



Date
Quote #
Project Name
Type



## CATU - Light Column

### Description:

Linear light column made of heavy duty fabricated aluminum (6061-T6). Standard comes with one linear lens on front and back face, along with side window. Light engine varies per lens size.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
CATU-24	(A)24 24 LED (Max)	A(24LED)+B(12LED) 5276	3000K	UNV 120-277V
CATU-36	(A)36 36 LED (Max)	A(36LED)+B(12LED) 7433	3500K	HLV 347-480V
CATU-48	(A)48 48 LED (Max)	A(48LED)+B(12LED) 10637	4000K	
CATU-60	(A)60 60 LED (Max)	A(60LED)+B(12LED) 12679	5000K	
	(B) 12 LED (Max)			

For better illustration on A+B see {page 2}

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchor, bolts & template	OAL Opal acrylic lens	FBS Front, back and side light (Std)	SD Step dimming	Standard
			MS Motion sensor	BL Black
			TS Tamperproof screws	WH White
			TP Tamperproof hardware	SG Silver Grey
			PC Button photocell	Custom
			COM Intercom	CC Custom Color
			EM Emergency battery	See website for custom colors. Contact factory for physical samples.
			GFR Ground fault receptacle	
			BC Base cover	
			TCO Trespass cut off	

- Lumens are based on max wattage & 5000K CCT for (all windows)
- IES files available upon request
- Std - Standard Offering

Since product development is an on-going process, Solera reserves the right to change the information on this spec sheet.



Date Modified: 06-15-2023





**Dimensions & Mounting:**

Please note that drawings are not to scale.

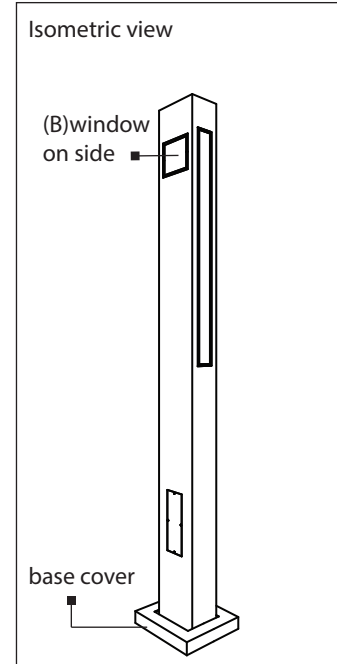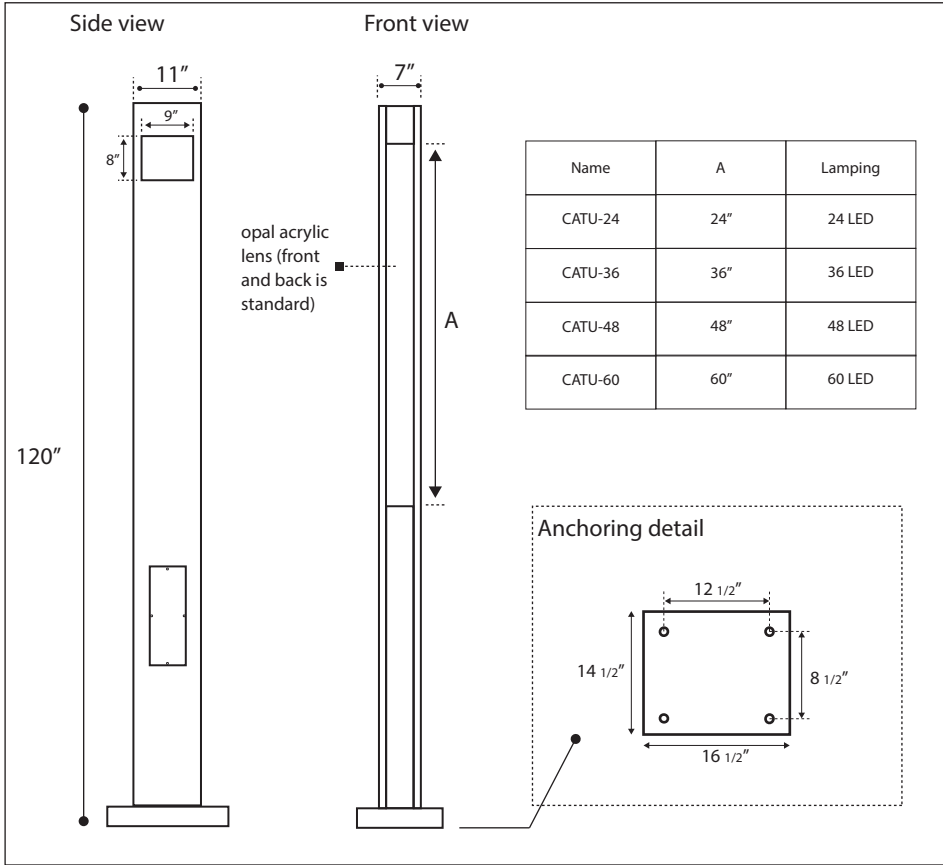

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

