



Date
Quote #
Project Name
Type



DRUM - Pendant

Description:

Circular pendant with a fabricated aluminum frame. Choose between a Fabric or Vinyl finish. Opal acrylic lens on the bottom is standard.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
DRUM-60	60 60W LED (Max)	10548	2700K	UNV 120-277V
			3000K	HLV 347-480V
Custom dimensions available (contact factory)			3500K	
			4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
P48 48" pendant stem (Std)	OAL Opal acrylic lens (Std)	D Down light (Std)	DM 0-10V dimming	Standard FAB Off-white Fabric
3AC48-TR 3 aircraft cables converge to a single canopy	OPL Opal polycarbonate lens	UD Up and down light	DM1 1% dimming	VIN Vinyl
3AC48-SPD Aircraft cable spider mount with 3 connecting to hub			TC Tiered custom (contact factory)	Custom
3AC48-SPD-P Combination of aircraft cables and stem			RB Remote ballast/driver	Contact factory for finish samples, custom prints also available. See website for colors/textures on fabric and vinyl finishes.
			BG Bug shield	
CM Ceiling mount				



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

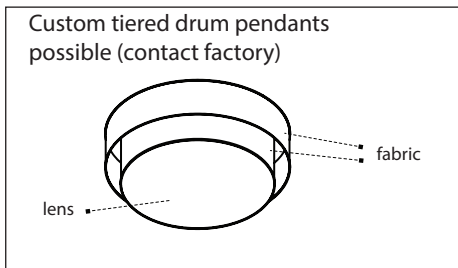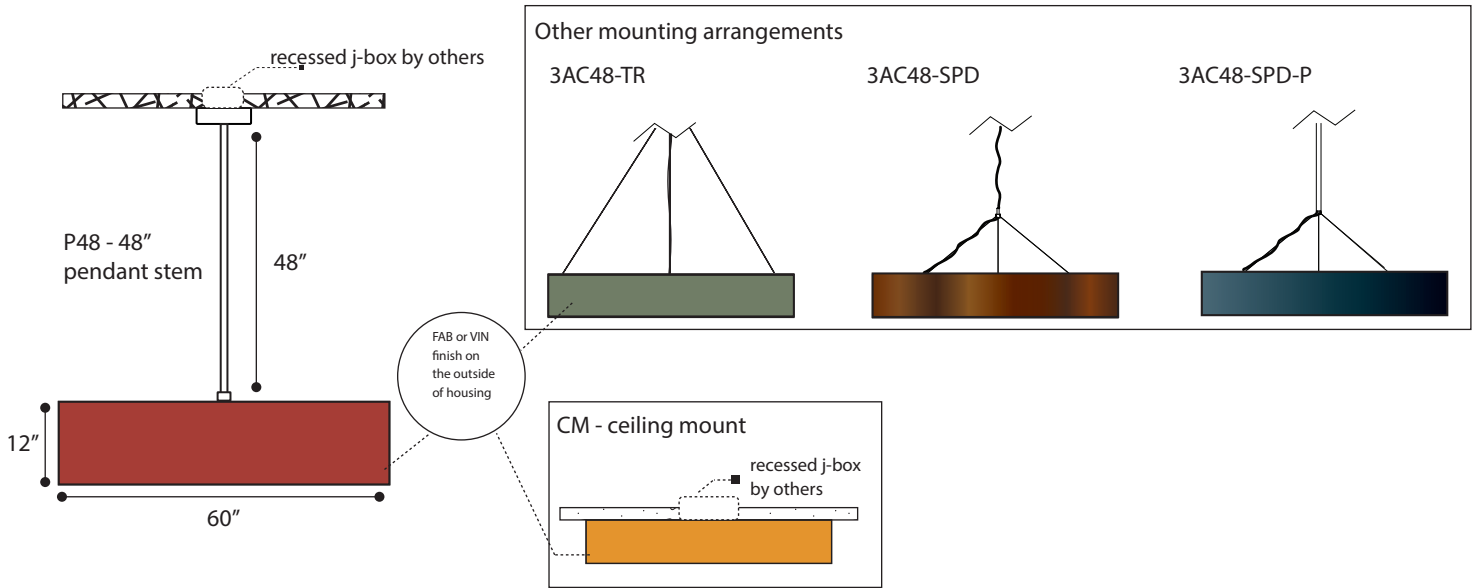

Listing:

Complies to CSA and UL standards.

Polar Graph:

