



Date
Quote #
Project Name
Type



ERA - Post Top

Description:

Featuring a flat disc hood and louvered optical assembly. Flat disc sits at the top of the fixture housing. All external hardware is made of stainless-steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
ERA	60W LED (Max)	7800	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes	
PT3 Post top slips over 3" dia pole	CPL Clear lens (Std)	TY5 Type V (Std)	SD Step dimming	Standard	
			MS Motion sensor	BL Black	
PT4 Post top slips over 4" dia pole		TY3 Type III	PC Button photocell	WH White	
			SF Single fuse	SG Silver Grey	
WM Wall mount			TCO Trespass cut off	BZ Bronze	
			TP Tamperproof hardware		Custom
			TS Tamperproof screws		CC Custom Color
			DR Decorative rings (exterior)		See website for custom colors. Contact factory for physical samples.
			LVR Internal louvers		

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

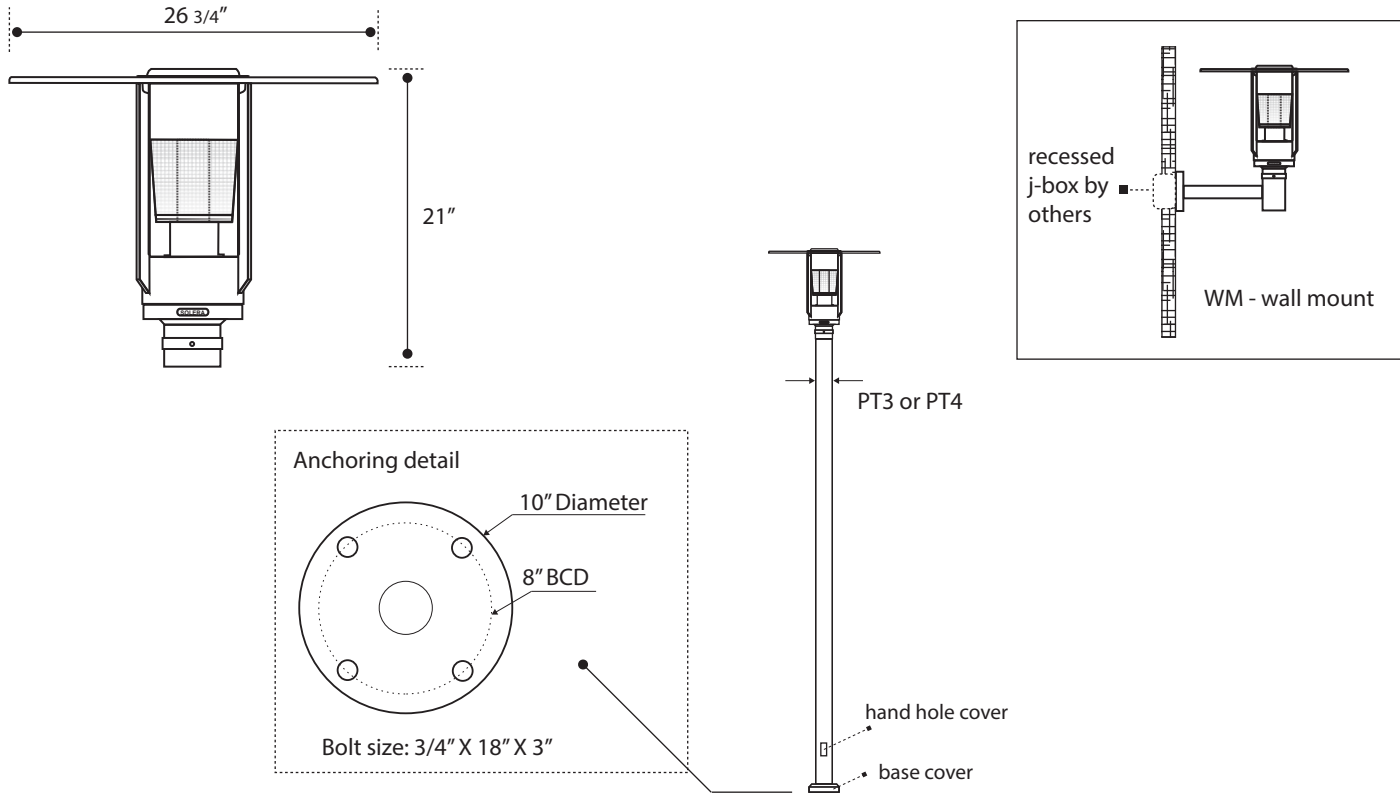

Listing:

Complies to CSA and UL standards.

Polar Graph:

