

Date:

Type:

Project:



ESHA PENDANT

Extruded driver housing with an illuminated neck and spun aluminum dome. Downlight open bottom is the standard. Contact factory for varying color finishes.

Name	Size	Lamping	Lumens*	Color Temp	Electrical			Mounting
ESHA	16	18W	2937	3000K	UNV	120-277V	P36-CMB	36" sturdy stem from ballast canopy
				3500K	HLV	347-480V	AC48-CMB	48" aircraft cable from ballast canopy
				4000K				
				5000K				
Contact for custom								

Lens		Light Pattern		Options			Finishes	
OB	Open bottom (Std)	D	Down light with 10% up light (Std)	DM	0-10V Dimming	BL	Black	
CPL	Clear lens			RB	Remote driver	BZ	Bronze	
OPL	Opal lens			SV	Swivel Canopy	WH	White	
FL	Frosted lens					SG	Silver Grey	
FM	Frosted lens, middle					BA4	Brushed Aluminum #4	
						CC	Custom Color	
Contact factory for varying finishes. See finishes info on website								

*Lumens are based on Wattage, Type V Distribution, and 5000K CCT

*Specific IES Files available upon request


Std – Standard Offering

ESHA- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.


Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

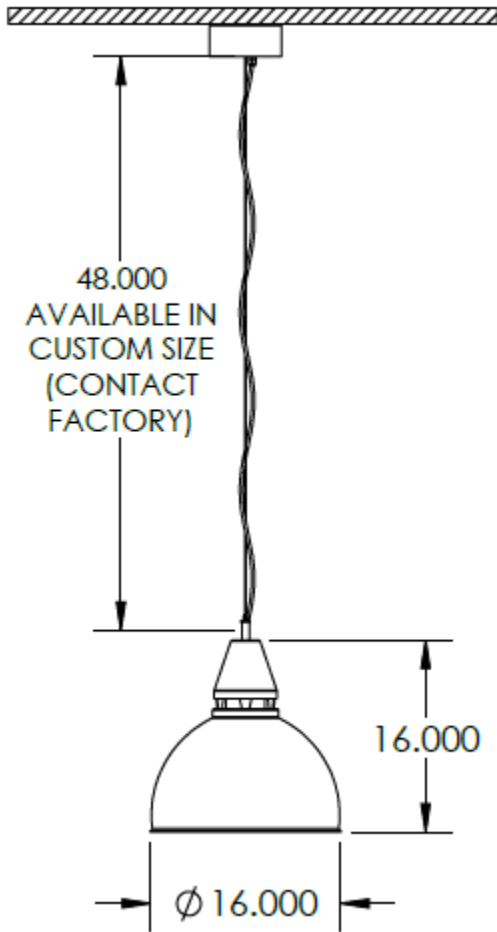


LED DRIVER HOUSING

ALUMINUM
FIXTURE HOUSING

AVAILABLE IN
VARYING FINISHES
(CONTACT
FACTORY)

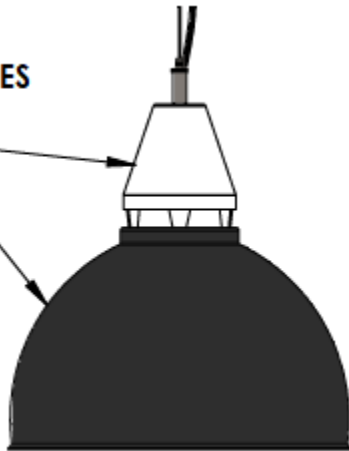

MOUNTING OPTIONS:

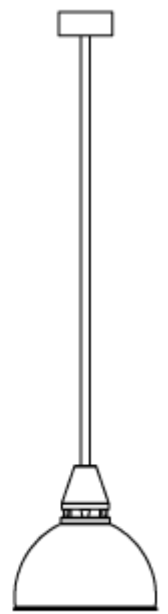

ESHA-AC

ESHA-P