



Date
Quote #
Project Name
Type



ICON - Bollard

Description:

Constructed of pre-cast concrete, where the top cap is removable for easy lamp maintenance.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
ICON	48 LED (Max)	6240	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts & template	OAL	Opal acrylic lens (Std)	TY5	Type V (Std)	TP	Tamperproof hardware	CONC	Concrete
		CAL	Clear acrylic lens	180	180 degrees	TS	Tamperproof screws	Select finish for frame around lens. BL - Black WH - White SG - Silver Grey BZ - Bronze	
						PC	Button photocell	CC - Custom colors available (see website)	
						SF	Single fuse		


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

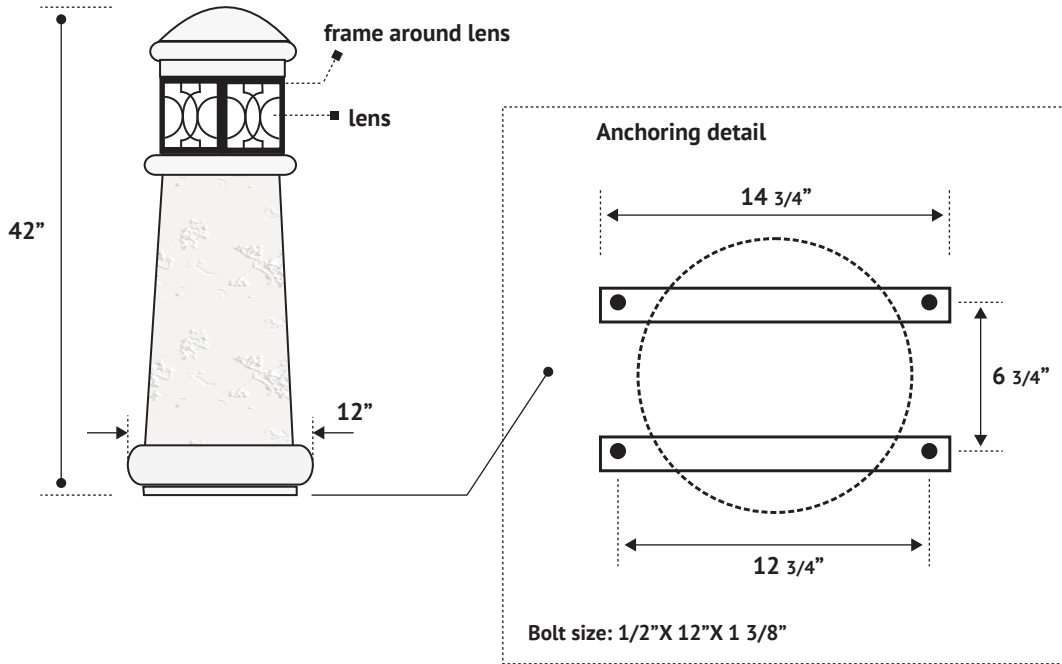

Listing:

Complies to CSA and UL standards.

Polar Graph:

TY5

