


|                 |
|-----------------|
| <b>Date:</b>    |
| <b>Type:</b>    |
| <b>Project:</b> |

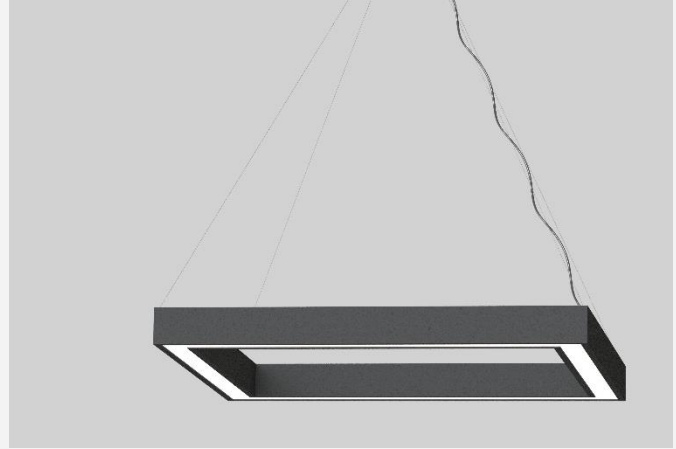

**KEY - PENDANT**

Square pendant with a low-profile, clean look. Standard luminaire depth is 4” with lens at the bottom. Constructed of aluminum extrusion and comes in various sizes. The aircraft cables are adjustable. Pendant stem length is cuttable. Several mounting options to choose from.

| Name | Light Engine                      |         | Fixture Lumens* | Color Temp    | Electrical |          | Mounting  |  |
|------|-----------------------------------|---------|-----------------|---------------|------------|----------|-----------|--|
| KEY  | 24                                | 24W LED | 1,421           | 3000K         | UNV        | 120-277V | 4AC48     | four 48” aircraft cables with individual square canopies       |
|      | 36                                | 36W LED | 2,119           | 4000K         | HLV        | 347-480V | 4AC-SPD   | four aircraft cables & spider mount connecting to hub          |
|      | 48                                | 48W LED | 2,821           | 5000K         |            |          | 4AC-TR    | four aircraft cables converge to single square canopy          |
|      | 60                                | 60W LED | 3,670           | RGBW          |            |          | 4AC-SPD-P | combination of 4 aircraft cables, spider mount, & pendant stem |
|      | 72                                | 72W LED | 4,243           |               |            |          |           |  |
|      | Contact Solera for other wattages |         |                 | Specify other |            |          |           | Contact Solera for other lengths                               |

| Lens                                |                   | Optics |                   | Options |                       | Finishes |  |
|-------------------------------------|-------------------|--------|-------------------|---------|-----------------------|----------|--|
| OAL                                 | Opal Acrylic Lens | D      | Down Light (Std)  | DM      | 0-10V Dimming         | BL       | Black  |
|                                     |                   | UD     | Up and Down Light | DM1     | 1% Dimming            | WH       | White  |
|                                     |                   |        |                   | 2CC     | 2 Circuit Wiring      | SG       | Silver Gray                                      |
|                                     |                   |        |                   | SF      | Single Fuse           | BZ       | Bronze   |
|                                     |                   |        |                   | EM      | Emergency Battery     | CC       | Custom Color                                     |
|                                     |                   |        |                   | RB      | Remote Ballast/Driver |          |  |
| Contact Solera for other lens types |                   |        |                   |         |                       |          | <a href="#">See finishes brochure for custom</a> |


\*Lumens are based on wattage and 5000K CCT.  
Std - standard

KEY- \_\_\_\_\_


**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Mounting Options (drawings are not to scale):

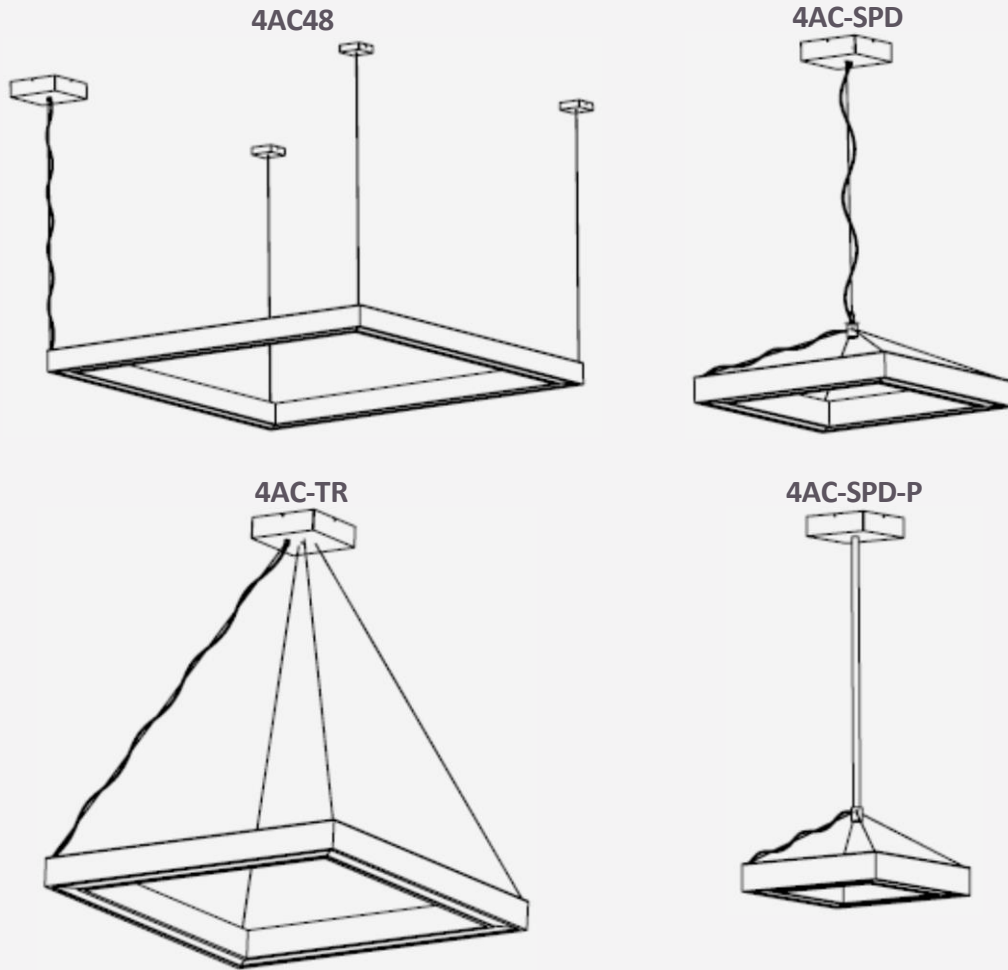

Polar Graph

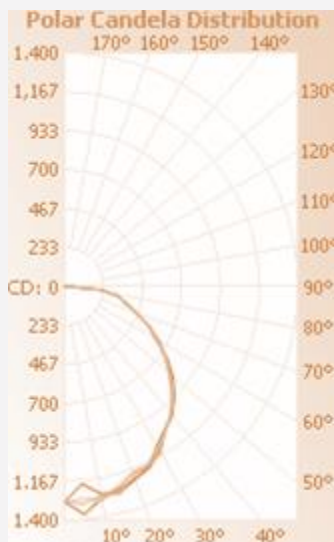

Downlight

Dimensions (in inches & drawings are not to scale):

