



Date
Quote #
Project Name
Type



## LAN - Post Top

### Description:

Post top with cast aluminum decorative arms, clear lens and internal louvers. All external hardware is stainless-steel.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
LAN	60W LED (Max)	7800	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
PT3	Post top slips over 3" pole	CPL	Clear polycarbonate lens (Std)	TY5	Type V (Std)	SD	Step dimming	Black	
PT4	Post top slips over 4" pole	OPL	Opal polycarbonate lens	TY3	Type III	MS	Motion sensor	BL	Black
						TCO	Trespass cut off	WH	White
						TP	Tamperproof hardware	SG	Silver Grey
						TS	Tamperproof screws	BZ	Bronze
						SF	Single fuse	Custom	
						PC	Button photocell	CC	Custom Color
						GFI	Ground fault interrupter		See website for custom colors. Contact factory for physical samples.
BA	Banner arm								
DH	Decorative hood								
LVR	Internal louvers								


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

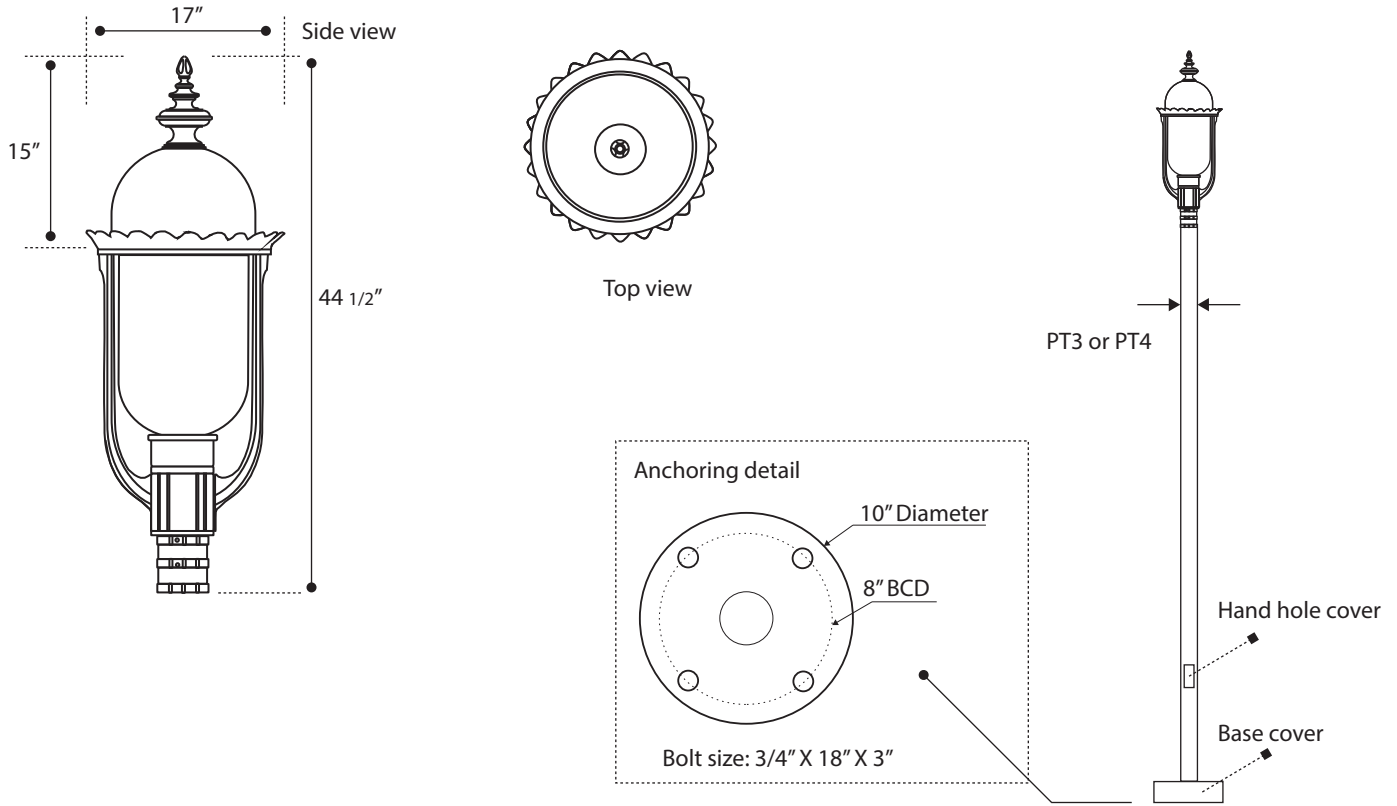

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

