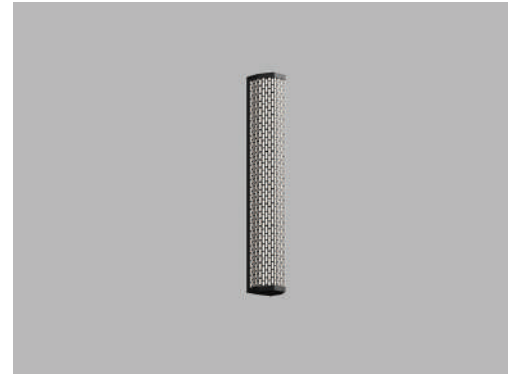| Date |
| Quote # |
| Project Name |
| Type |

MESH - Wall Mount

Description:

MESH is a wall mount luminaire that gives off a unique glow effect. Aluminum frame around lens is perforated, choose between honey comb or slot. All external hardware is stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
	-		-		-		-		-		-		-		-	

Name	Light Engine		Source Lumens (LED)(5000K)	Color Temp	Electrical
MESH-23	23	20W LED (Max)	3520	2700K	UNV 120-277V
MESH-36	36	30W LED (Max)	5280	3000K	HLV 347-480V
MESH-48	48	40W LED (Max)	7040	3500K	
				4000K	
				5000K	
	Contact for custom		Contact for custom	Contact for custom	

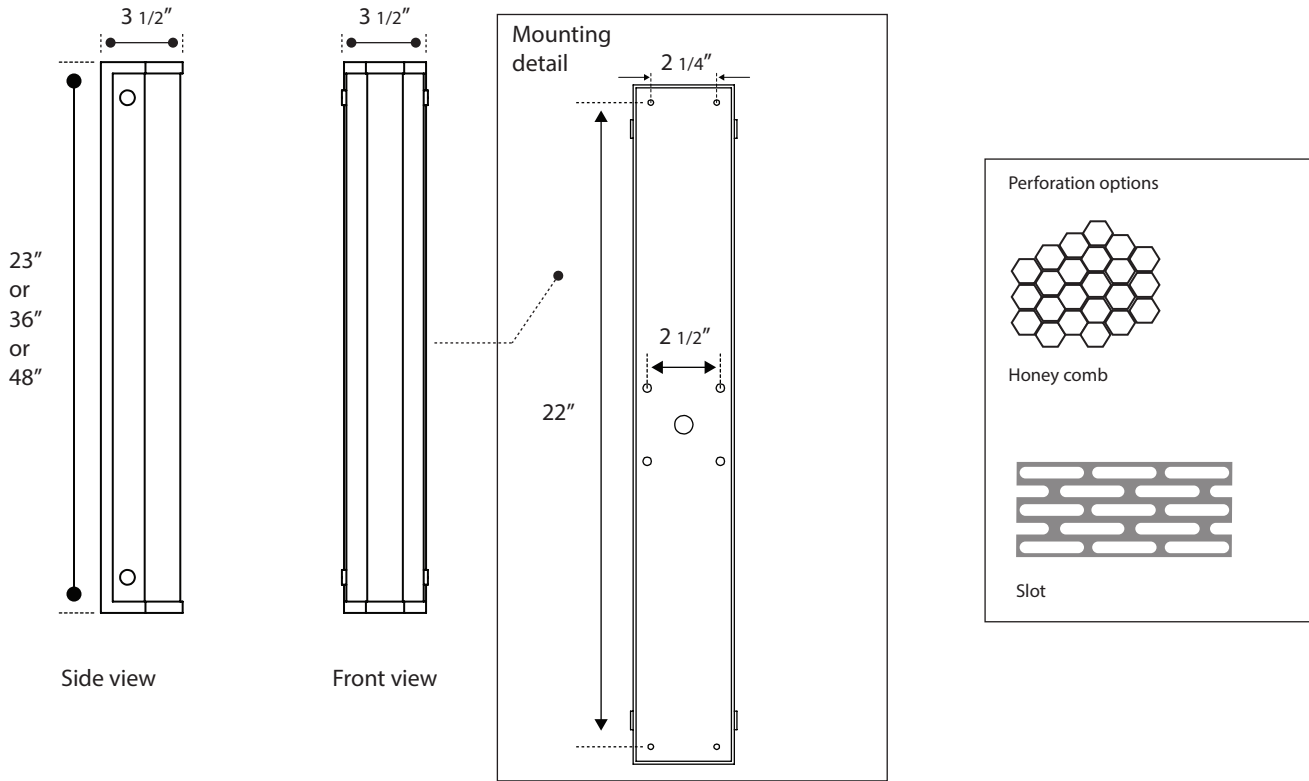| Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall mount	OPL	Opal polycarbonate lens (Std)	F	Front light	DM	0-10V dimming	Standard	
						EM	Emergency battery	BL	Black
						WL	Wet location	WH	White
						PC	Button photocell	SG	Silver Grey
						MS	Motion sensor	BZ	Bronze
						RB	Remote ballast/driver	Custom	
								CC	Custom Color
						TP	Tamperproof hardware		See website for custom colors. Contact factory for physical samples.
						TS	Tamperproof screws		
						SF	Single fuse		

• Lumens are based on max wattage & 5000K CCT
• IES files available upon request
• Std - Standard Offering

Since product development is an on-going process, Solera reserves the right to change the information on this spec sheet.

Dimensions & Mounting:

Please note that drawings are not to scale.

3 1/2″

3 1/2″

23″
or
36″
or
48″

Mounting detail

2 1/4″

22″

2 1/2″

Side view

Front view

Perforation options

Honey comb

Slot

Listing:

Complies to CSA and UL standards.

Polar Graph:

F

180° 160° 140°

120°

100°

80°

60°

0°   20°   40°

Date Modified: 06-15-2023