



Date
Quote #
Project Name
Type



## MOD - Wall Recessed

### Description:

Housing and door frame are constructed of cast aluminum. Frosted tempered glass lens is standard.  
 All external hardware is stainless steel.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
MOD	11W LED (Max)	1722	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
R Recessed in dry wall	FG Frosted glass lens (Std)	FT Forward throw	TP Tamperproof hardware	Black
RTC Recessed in concrete			TS Tamperproof screws	BL Black
			WL Wet location	WH White
			SF Single fuse	SG Silver Grey
				BZ Bronze
				Custom
				CC Custom Color

See website for custom colors.  
 Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







**Dimensions & Mounting:**

Please note that drawings are not to scale.

Side view

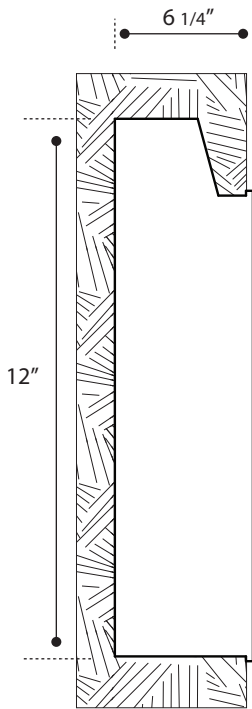

Front view

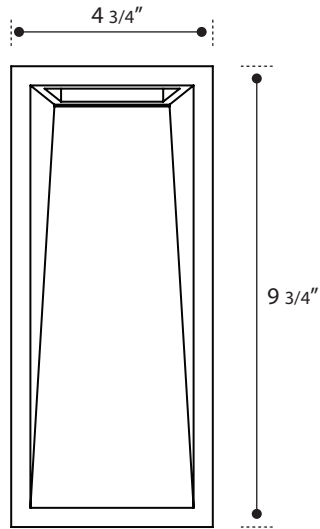

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

