




Date
Quote #
Project Name
Type

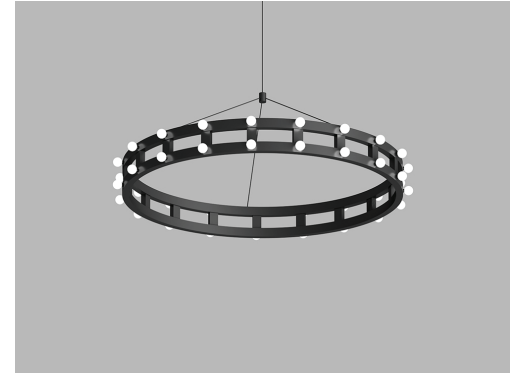

O-RING - Pendant

Description:

Circular pendant that comes with double or single ring options. Lamps by others: only medium base holders provided.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
O-RING-36"	Not available	Not available	Not available	UNV 120-277V
O-RING-48"				HLV 347-480V
O-RING-60"				
O-RING-72"				
O-RING-96"				
O-RING-110"				

Contact for custom Contact for custom Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
3AC48-CMB 3X48" aircraft cables with individual canopies	Not available	EG Encompassing glow	SR Single ring DR Double ring	Black BL Black WH White SG Silver Grey BZ Bronze Custom
3AC48-SPD 3 aircraft cables connect to spider mount hub				
3AC48-TR 3 aircraft cables converge to a single canopy				
3AC48-SPD-P Combination of aircraft cables and stem				CC Custom Color See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

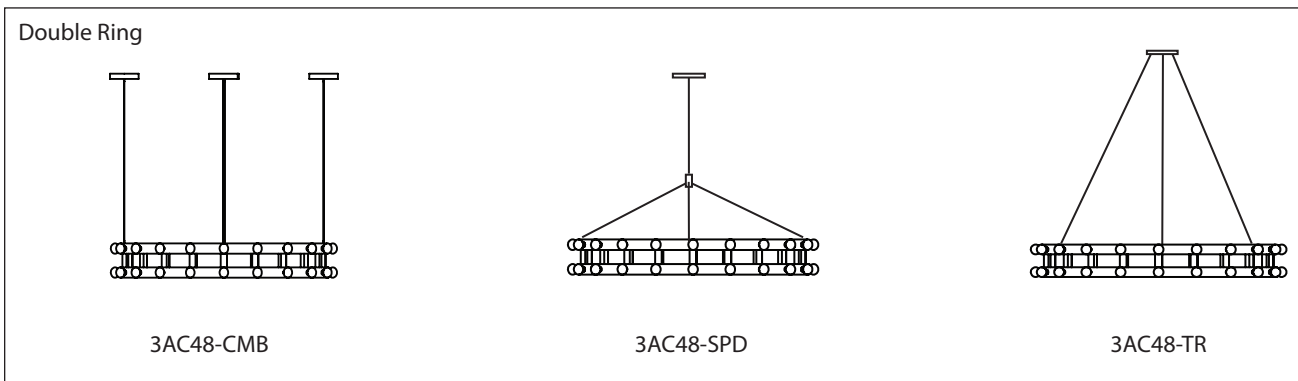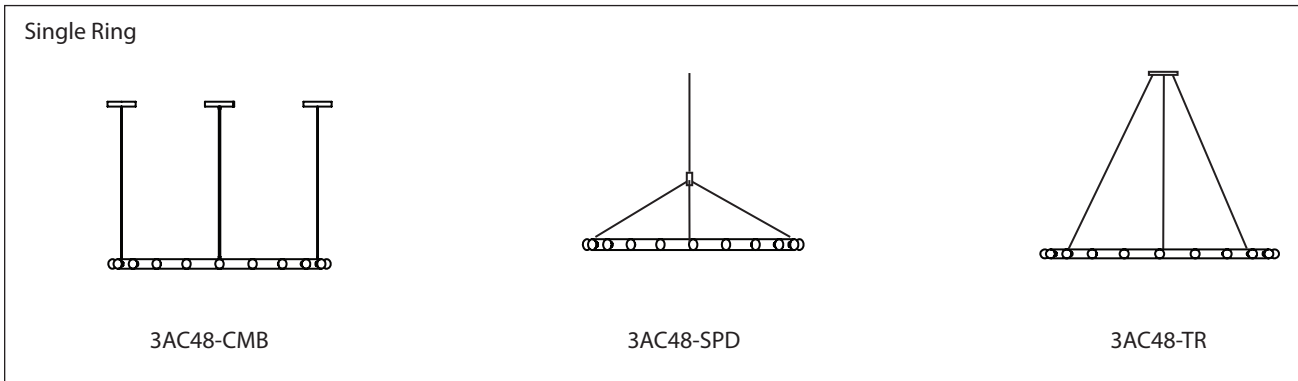

Listing:

Complies to CSA and UL standards.

Polar Graph:

Not available

