



Date
Quote #
Project Name
Type



PHARE - Bollard

Description:

PHARE is designed to add an exceptional touch to pathways. Various optical systems are available to suit the space.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
PHARE-6	6 36 LED (Max)	4680	3000K	UNV 120-277V
PHARE-8	8 42 LED (Max)	5460	3500K 4000K 5000K	HLV 347-480V
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchors, bolts and template	OAL Opal acrylic lens (Std)	6W 6 Windows, type V	MS Motion sensor	Standard
		3W 3 Windows, type III	SD Step dimming	BL Black
		180 180 degrees	TP Tamperproof hardware	WH White
			TS Tamperproof screws	SG Silver Grey
			PC Button photocell	BZ Bronze
			SF Single fuse	Custom
			GFR Ground fault receptacle	CC Custom Color
			RGBW Programmable color changing LEDs	See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

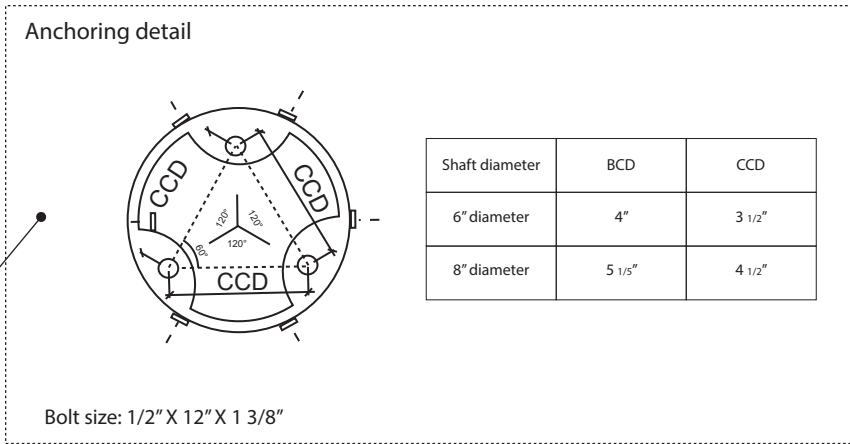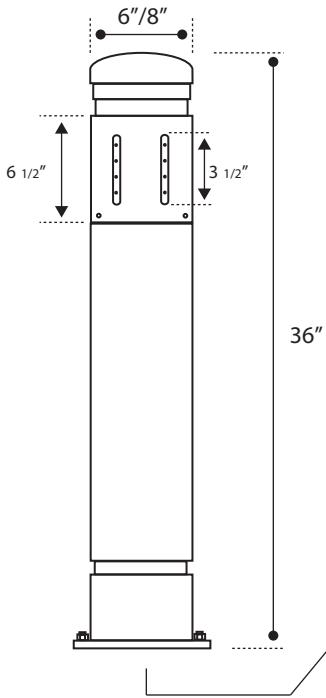

Listing:

Complies to CSA and UL standards.

Polar Graph:

TY5

