


Date:

Type:

Project:

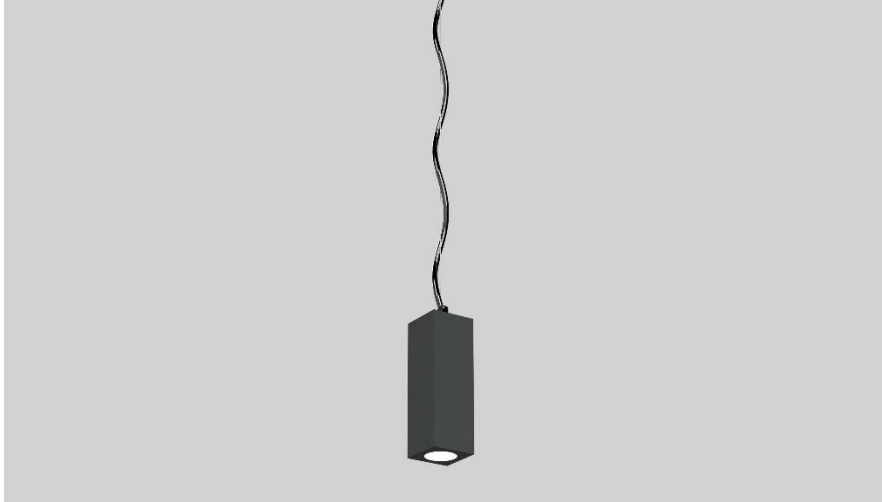

SBP4 PENDANT

4" square pendant that is designed to emit light directly and / or indirectly. Housing is made from aluminum extrusion & silicone sealed for full weather protection. Standard offering is downlight configuration at 12" luminaire height. Check out other mounting options under Indoor Surface Luminaire.

Name	Height (in inches)	Light Engine	Lumens*	Color Temp	Electrical	Mounting
SBP4	12	15W LED (max)	1300	3000K 3500K 4000K 5000K	UNV HLV 120-277V 347-480V	P48 AC48 2AC48 Fixture suspended from a 48" pendant stem for downlight only Fixture suspended from a 48" aircraft cable for downlight only 2 aircraft cable suspension for down light & U/D light patterns
				Contact Solera for other Luminaire sizes and higher lumen package		Contact Solera for other suspension lengths

Lens		Light Distribution		Options		Finishes	
CPL	Clear polycarbonate lens (Std)	WB	Wide beam (Std)	TP	Tamperproof hardware & screws	BL	Black
FL	Frosted lens	MB	Medium beam	DM	0-10V Dimming	BZ	Bronze
K12	Prismatic lens	NB	Narrow beam	RB	Remote driver	WH	White
				U/D	Indirect & direct light patterns	SG	Silver Grey
						BA4	Brushed Aluminum #4
						CC	Custom Color
						See finishes info on website	


*General lumens are based on Wattage and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

SBP4- _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (measurements in inches; drawings are not to scale)

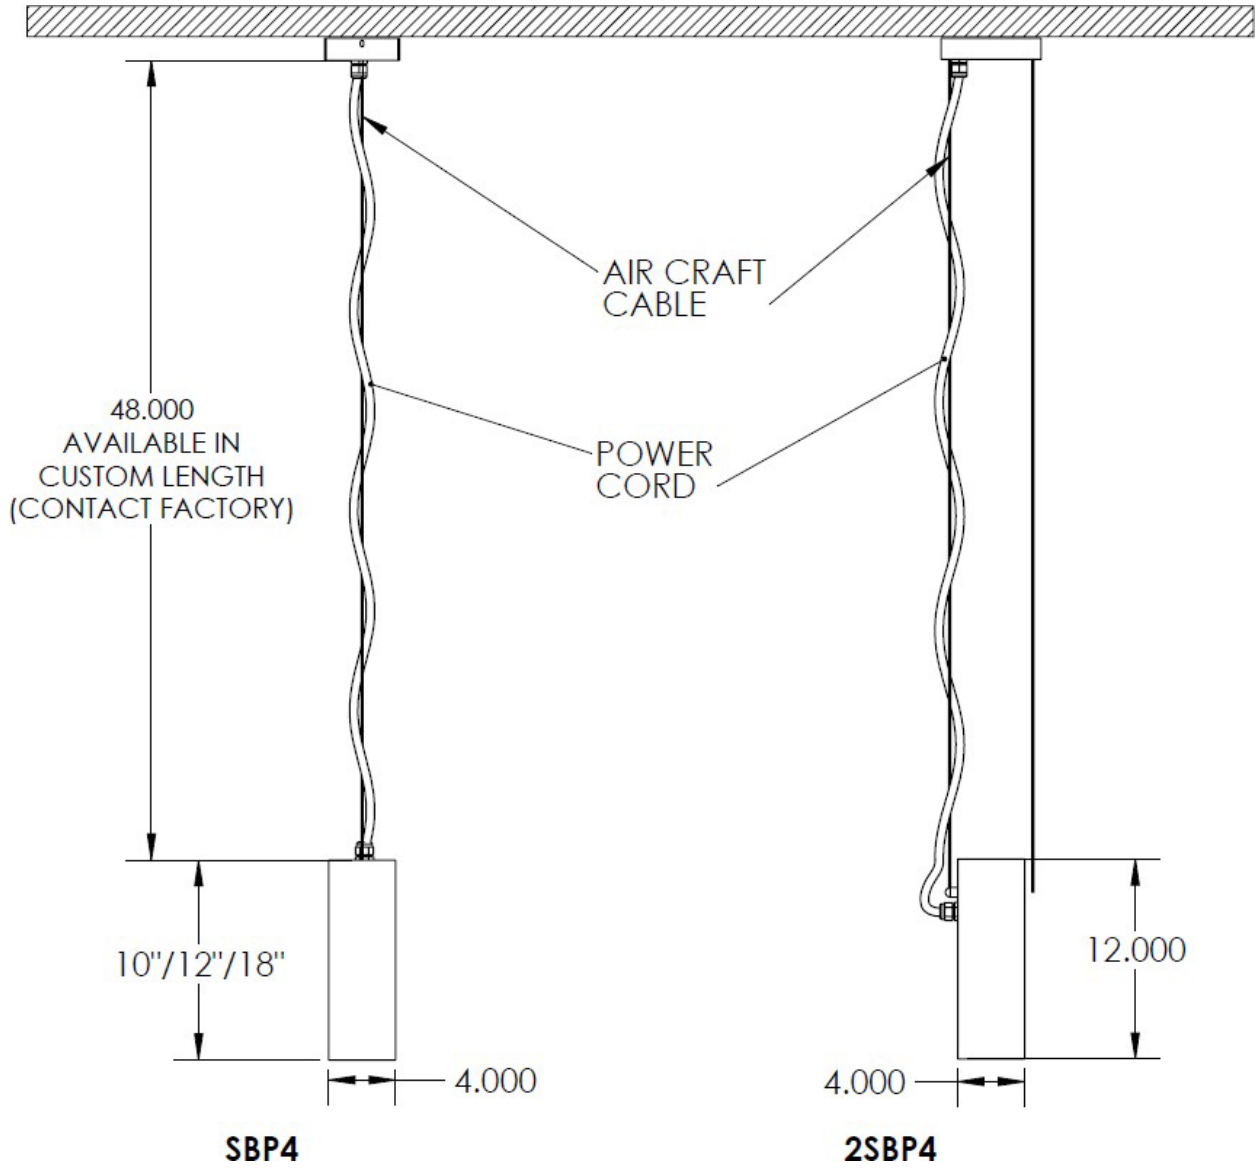

MOUNTING OPTIONS:

