

Date: _____

Type: _____

Project: _____

SOX-WM WALL MOUNT

Modern and simple design. Wall mounted down light fixture with TYPE-II, TYPE-III, TYPE-IV light distribution.

Construction: Fixture housing constructed from aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Fixture is suitable to mount over octagonal J-box. (North America only)

Lens: Clear lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature
CRI 80

Light distribution: Type II, Type III, Type IV



Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

Options: 0-10V Dimming, 1% Dimming, Wet location

Finish: Black, White, Silver Gray, Bronze
(Custom color available upon request)


Listing: Complies with CSA & UL Standards, for indoor and outdoor location.

Warranty: [5-year limited warranty](#)

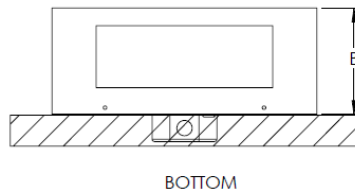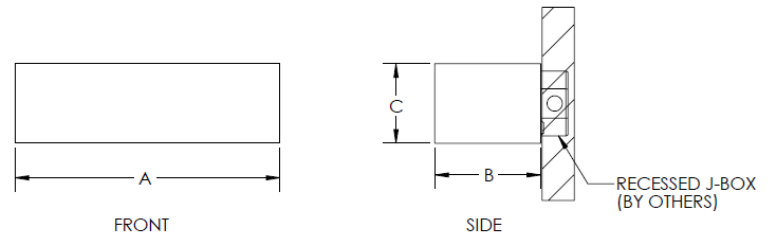


FIXTURE	"DIM-A"	"DIM-B"	"DIM-C"
SOX-WM-S	10.00	6.00	4.50
SOX-WM-L	15.00	6.00	4.50


Distributions:



TYPE-II



TYPE-III



TYPE-IV



--	--	--	--	--	--	--	--	--

Name	Light Engine	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
SOX-WM-S	20W LED (max)	3000K	UNV	WM-OCT	CPL	TY2	DM DM1	BL
SOX-WM-L	40W LED (max)	3500K	HLV			TY3	TP/TS WL	BZ
		4000K				TY4		WH
		5000K						SG
Contact Factory for custom dimensions								CC

Notes:

- 3000K – 152 lm/W
- 3500K – 153 lm/W
- 4000K – 160 lm/W
- 5000K – 160 lm/W
- UNV – Universal voltage (120V - 277V)
- HLV – High Low voltage (347V)
- WM-OCT – Wall mount over octagonal J-box (North America only)
- CPL – Clear lens
- TY2 – Type II light distribution
- TY3 – Type III light distribution
- TY4 – Type IV light distribution
- DM – 0-10V dimming
- DM1 – 1% dimming
- TP/TS – Tamperproof hardware
- WL – Wet location
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)