

Date:

Type:

Project:



SRBP-4 PENDANT

4" cylindrical pendant that emits light directly downwards. Housing is made from aluminum extrusion, silicone sealed for full weather protection. Available in three (3) luminaire heights. Check out other mounting options under Indoor Surface Luminaire.

Name	Sizes	Light Engine	Lumens*	Color Temp	Electrical	Mounting
SRBP-4	10	4 X 10"	15W LED	5000K	UNV 120-277V	P48 Fixture suspended from a 48" pendant stem
	12	4 X 12"		4000K	HLV 347-480V	
	18	4 X 18"		3500K 3000K		AC48 Fixture suspended from a 48" aircraft cable CM Ceiling mounted

Lens	Light Pattern	Options	Finishes				
CG	Clear lens (Std)	WB-D	Wide beam, down light (Std)	DM	0-10V dimming	BL	Black
		MB-D	Medium beam, down light	TP	Tamperproof hardware & screws	WH	White
				MP	Mono-point mounting	SG	Silver Grey
NB-D	Narrow beam, down light			BZ	Bronze		
				BA4	Brushed aluminum #4		
				CC	Custom Color		

[See finishes info on website](#)

*General lumens are based on Wattage and 5000K CCT

*Specific IES Files available upon request

Std – Standard Offering


SRBP-4- _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


Dimensions & Mounting (measurements in inches; drawings are not to scale)

RECESSED J-BOX
(BY OTHERS)

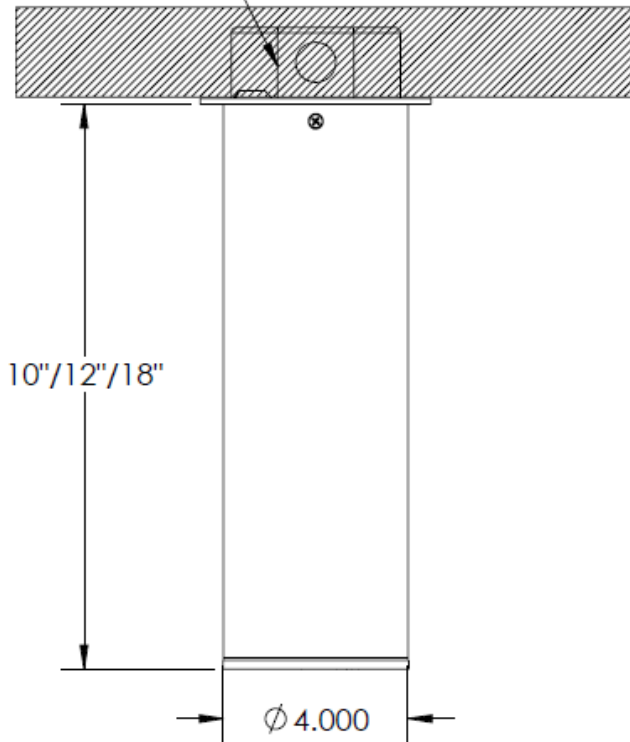

ALUMINUM
FIXTURE HOUSING

CLEAR LENS

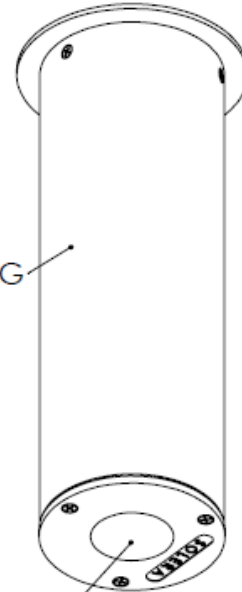

MOUNTING OPTIONS:



SRBC-4



SRBP-4-AC48



SRBP-4-P48