



Date
Quote #
Project Name
Type



SSL-30 - Wall Recessed

Description:

Cast aluminum housing construction with a opal acrylic drop lens (standard). Red, green, and blue LEDs available. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SSL-30	3W LED (Max)	422	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
R	Recessed in dry wall	OA-DL	Opal acrylic drop lens (Std)	FT	Forward throw	SF	Single fuse	Standard	
RTC	Recessed in concrete	OA-FL	Opal acrylic flat lens			TP	Tamperproof hardware	BL	Black
						TS	Tamperproof screws	WH	White
						RGBW	Programmable color changing LEDs	SG	Silver Grey
								BZ	Bronze
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

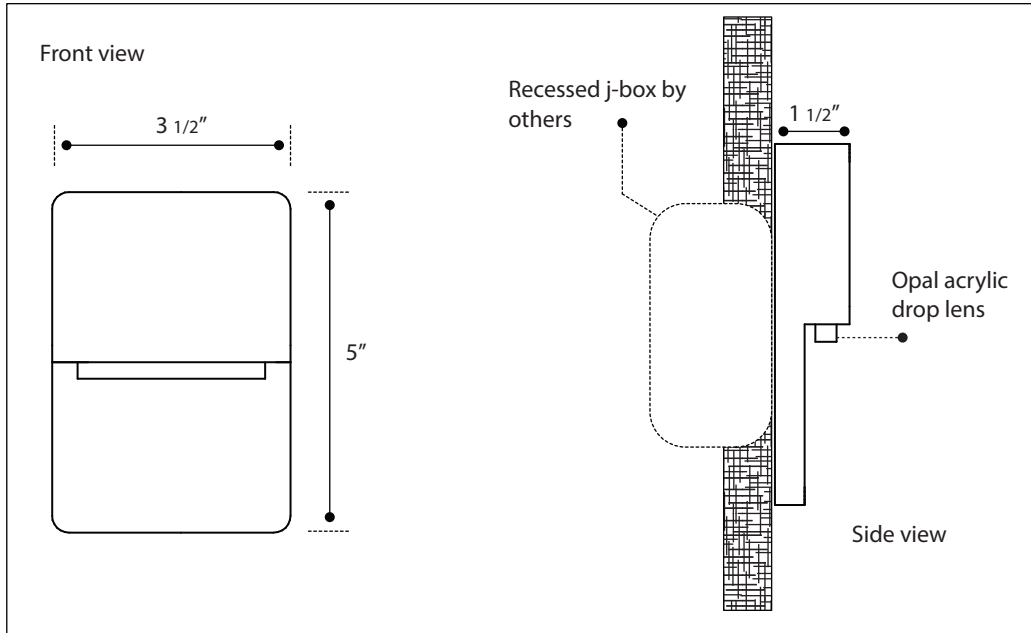

Listing:

Complies to CSA and UL standards.

Polar Graph:

