



Date
Quote #
Project Name
Type



SSQB-4B - Bollard

Description:

Constructed of extruded aluminum. Cylindrical opal acrylic lens is standard, the lens is covered by 4 bars. Light is emitted in pie shaped quadrants due to the placement of the aluminum bars. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
SSQB-4B-38	38	7W LED (Max)	3000K	UNV 120-277V
SSQB-4B-60	60	18W LED (Max)	3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts & template	OAL	Opal acrylic lens (Std)	TY5	Type V (Std)	TP	Tamperproof hardware	Standard	
						TS	Tamperproof screws	BL	Black
						PC	Button photocell	WH	White
						PERF	Perferated insert (inside lens)	SG	Silver Grey
						SF	Single fuse	BZ	Bronze
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

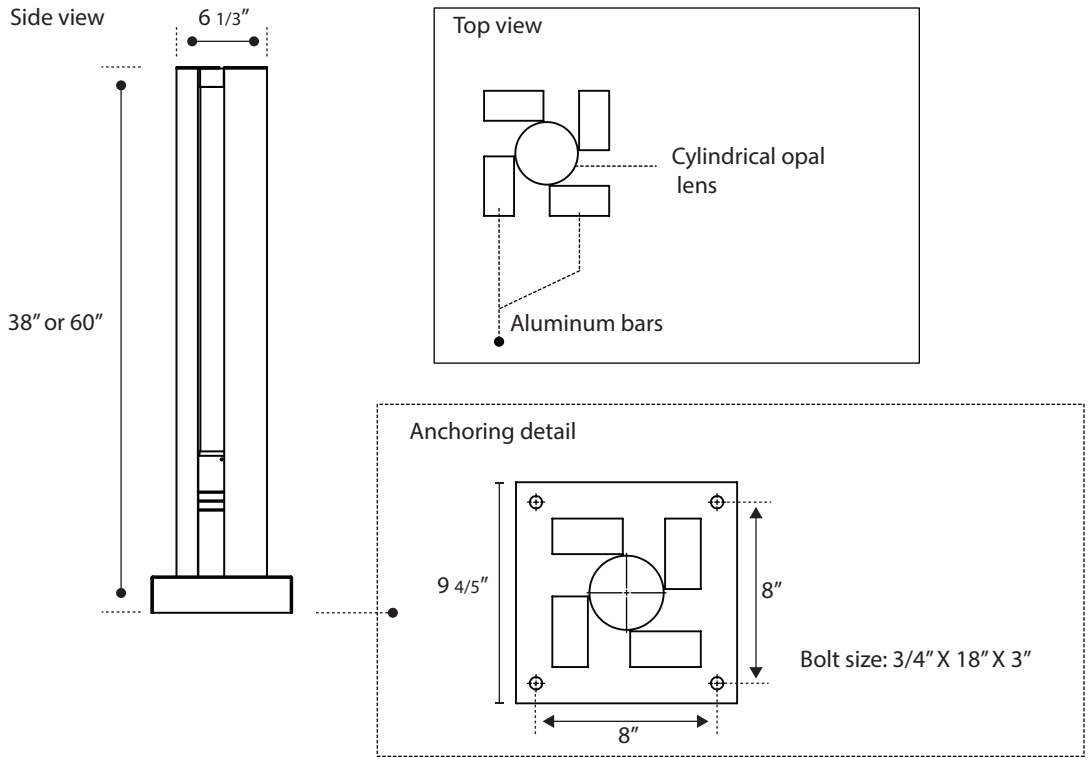

Listing:

Complies to CSA and UL standards.

Polar Graph:

