

Date:

Type:

Project:



SSQB BOLLARD

Square bollard fabricated from die-cast aluminum. The housing has 4 extruding bars separated by 90-degree angles. Clear lens is standard and silicone-gasketed for uncompromised outdoor performance. Standard bollard height is 40". Choose from three (3) widths. Check out the Light Column Version.

Name	Size	Lamping	Lumens*	Color Temp	Electrical	Mounting
SSQB	4	4" SQ	14W LED	1275	3000K	ABT Anchor, Bolts & Template
	6	6" SQ	30W LED	2078	3500K UNV 120-277V	
	8	8" SQ	36W LED	4680	4000K HLV 347-480V 5000K	

*Specify other

Contact Solera for other lengths

Lens	Optics	Options	Finishes
CPL Clear Polycarbonate Lens	TY5 Type V (Std)	HCO House cut-off	BL Black
	TY2 Type II	SF Single fuse	WH White
	TY3 Type III	TP/TS Tamperproof hardware & screws	SG Silver Gray
		PC Button photocell, voltage specific	BZ Bronze
	GFR Ground fault receptacle	CC Custom color	

[*See finishes info on website](#)

*General lumens are based on Wattage and 5000K CCT

*Specific IES Files available upon request



Std – Standard Offering

SSQB- _____

Customization Notes:


→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (measurements in inches; drawings are not to scale)

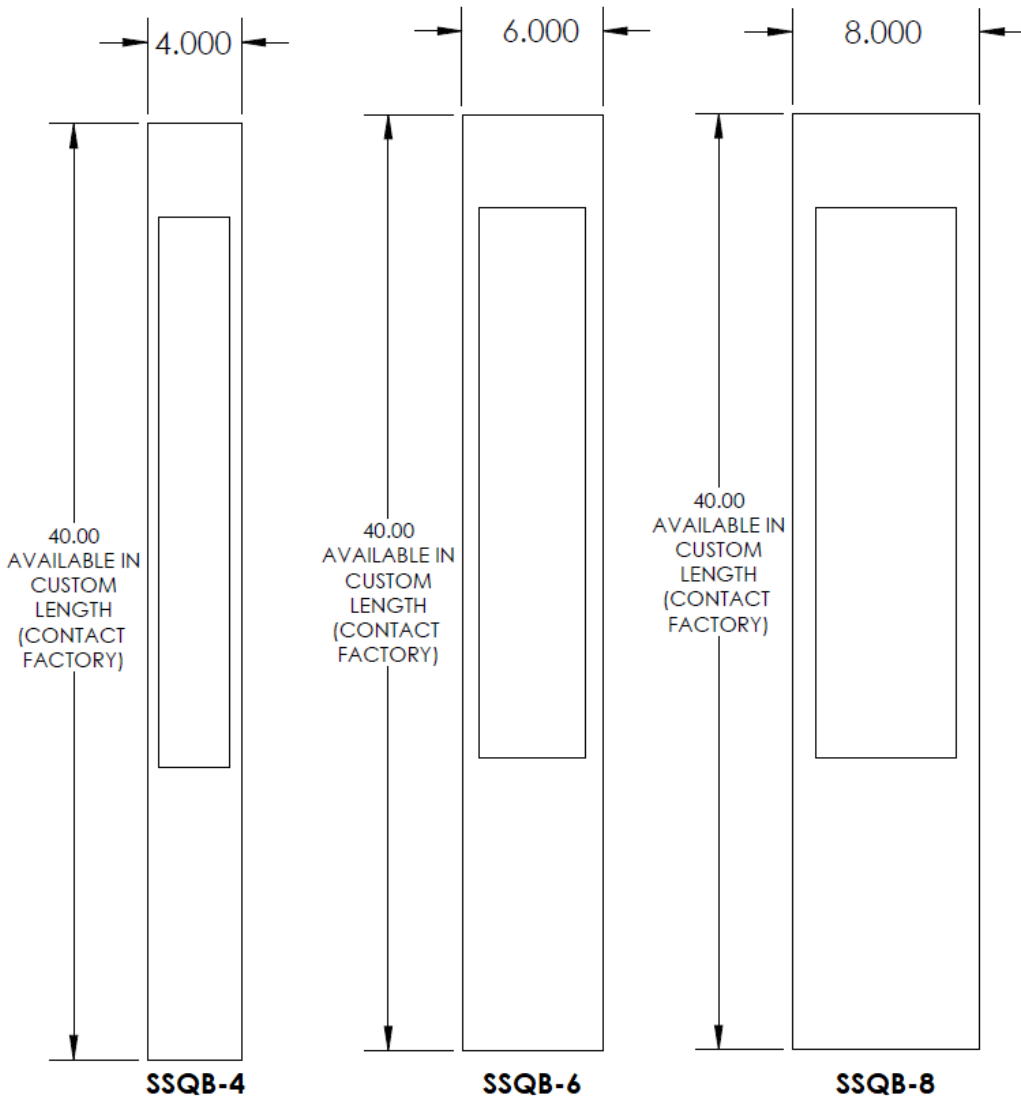

**AVAILABLE IN
COLUMN VERSION
(NAJA)**

Anchoring Details:

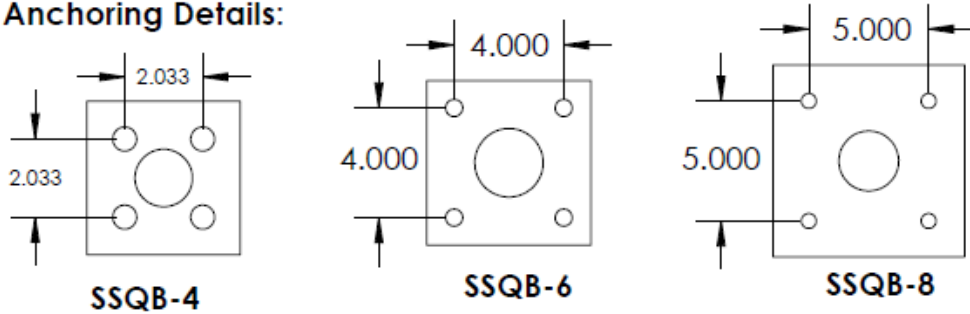

Anchorbolt Size: 1/2" X 12" X 1-3/8"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers