

Date:

Type:

Project:



TOWER LIGHT COLUMN

Heavy duty extruded aluminum housing construction with opal acrylic lens. Standard height is 20ft x 10" square. Custom lens sizes, block lengths, & cut-off available.

| Name | Lamping | Lumens* | Color Temp | Electrical | | Mounting | |
|-------|----------------------------|--------------------------|---------------|------------|----------|----------|---------------------------|
| TOWER | 336 W LED | 52,416 lumens | 3000K | UNV | 120-277V | ABT | Anchors, Bolts & Template |
| | | 55,104 lumens | 4000K | HLV | 347-480V | | |
| | | 55,775 lumens | 5000K | | | | |
| | Contact for other wattages | Contact for other lumens | RGBW | | | | |
| | | | Specify other | | | | |

| Lens | | Light Pattern | | Options | | Finishes | |
|---------------------------|-------------------------|---------------|--------------|---------|---|------------------------------|--------------|
| OAL | Opal Acrylic Lens (Std) | TY5 | Type V (Std) | TP | Tamperproof Hardware | BL | Black |
| Contact for other lengths | | | | TS | Tamperproof Screws | WH | White |
| | | | | PC | Button Photocell, voltage specific | SG | Silver Grey |
| | | | | SF | Single Fuse | BZ | Bronze |
| | | | | GFR | Ground Fault Receptacle | CC | Custom Color |
| | | | | DM | 0-10V Dimming | See finishes info on website | |
| | | | | COM | Intercom | | |
| | | | | BLK | 10" X 18" block, 5ft max, will reduce wattage | | |
| | | | | ST | Steplight, 10W LED | | |
| | | | | | | | |


*Lumens are based on Wattage & CCT for lamping
Std – Standard Offering

TOWER- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

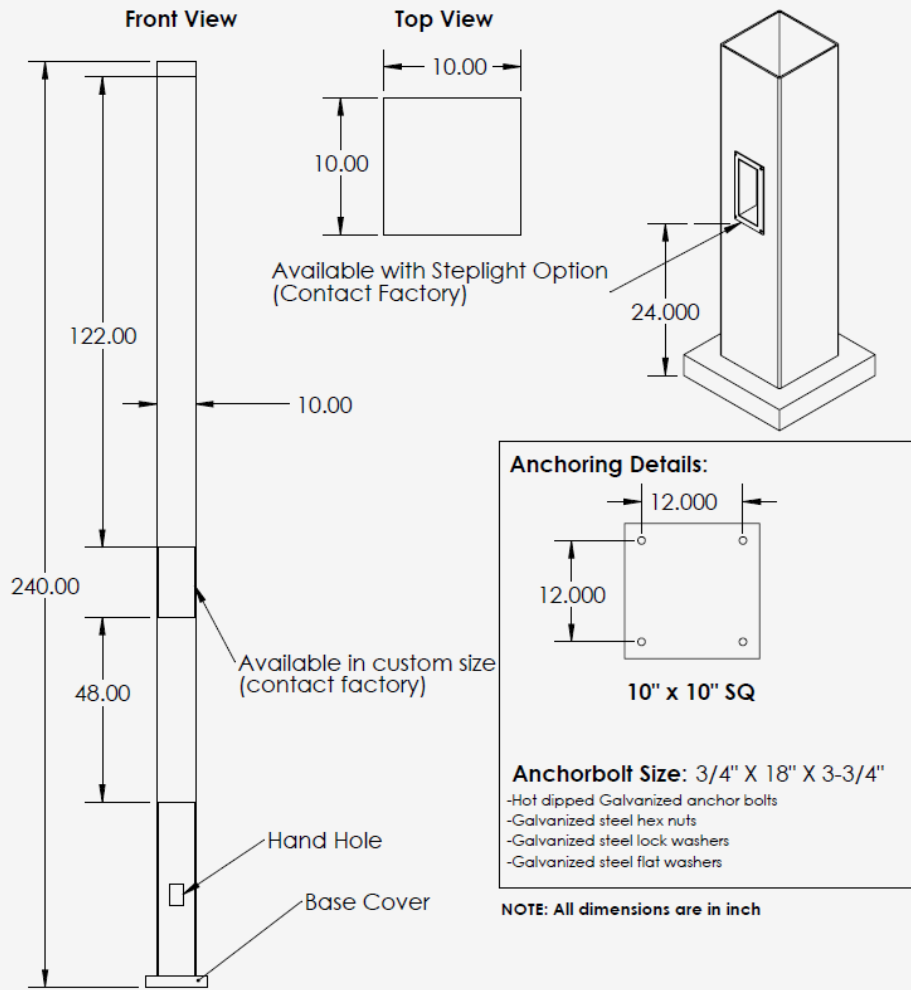

Polar Graph

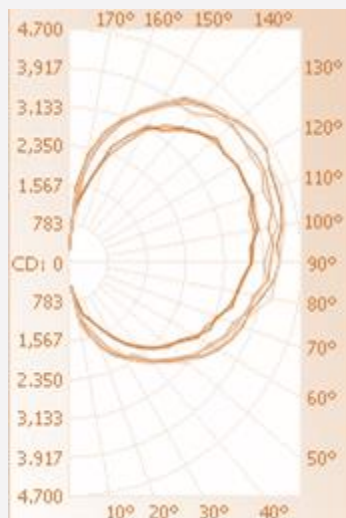

Type V