

Date:

Type:

Project:



VELA PENDANT

Luminaire features an extruded aluminum octagonal housing with neo-classical design. Gives illumination on all sides. This is a design family available in different mounting versions.

Name	Lamping	Lumens*	Color Temperature	Electrical	Mounting Options		
VELA	48W LED	7900	5000K 4000K 3500K 3000K	UNV	120-277V	CHAIN	Hung by chain, contact Solera for chain length 24" sturdy pendant stem
				HLV	347-480V	P	
						AC	Aircraft cable, 48" standard length
						PM	Pole mounted, see under Exterior Luminaire
Contact Factory for other mounting options							

Lens	Light Pattern	Options	Finishes				
FG	Frosted lens (Std)	TY5	Type V distribution	DM	0-10V dimming	BL	Black
				SV	Swivel canopy	BZ	Bronze
				EM	Emergency driver	WH	White
				RB	Remote driver	SG	Silver Grey
				CC	Custom Color		
Contact factory for varying finishes. See finishes info on website							



*Lumens are based on Max Wattage and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

VELA- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

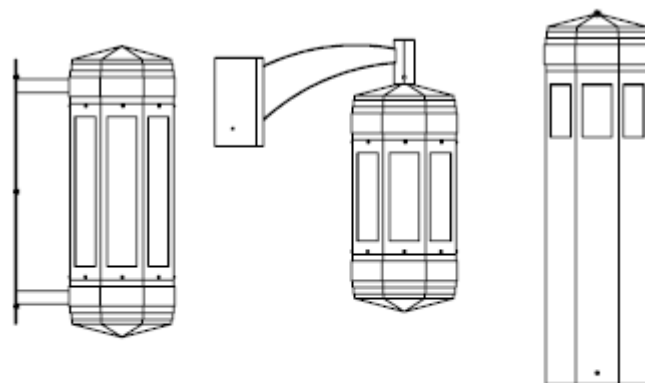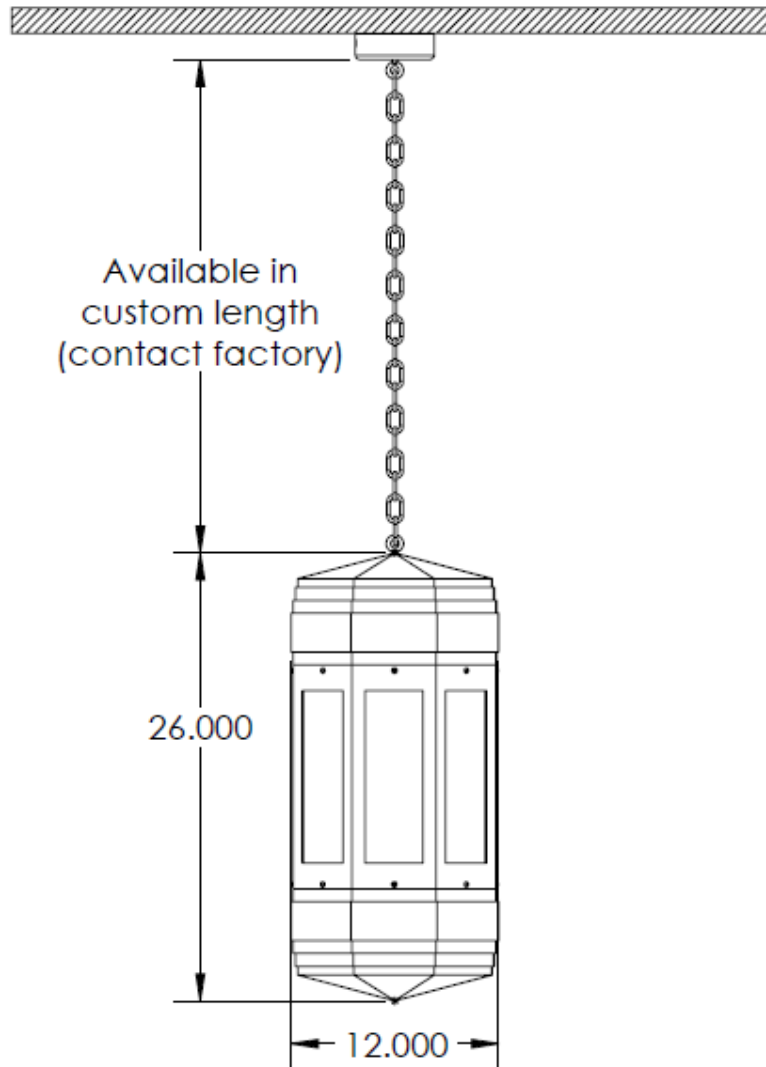

AVAILABLE IN WALL MOUNT, POLE MOUNT AND BOLLARD VERSION