

Date: _____

Type: _____

Project: _____

YUMI LIGHT COLUMN

A cylindrical decorative light column made from heavy duty aluminum extrusion. Available in different length and rotation angle.

Construction: Fixture housing constructed from 6061 aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Aluminum Anchoring Base mounts to 4 flush mounted anchor bolts.

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature
Available in RGBW





Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 5kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

Options: Natatorium finish, 0-10V Dimming, 1% Dimming, Wet location,

Finish: Black, White, Silver Grey, Bronze
(Custom color available upon request)

Listing: Complies with CSA & UL, Approved with Label for outdoor location. IP66 Rated

Warranty: 5- Year limited warranty

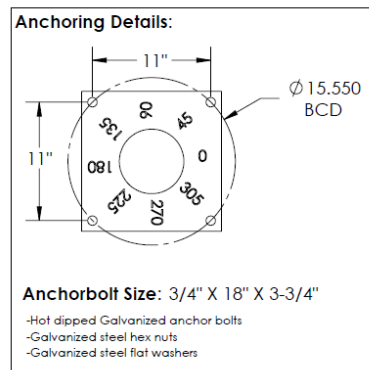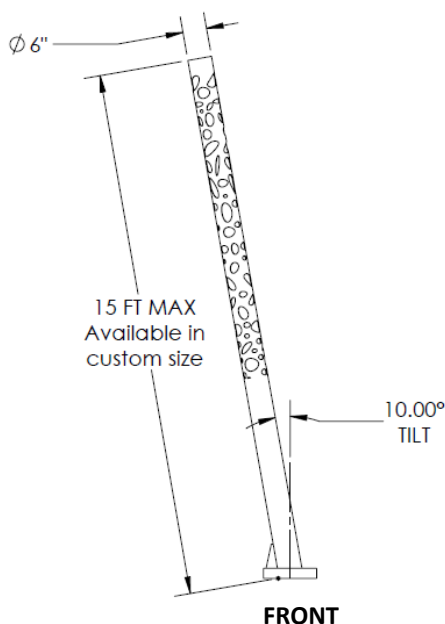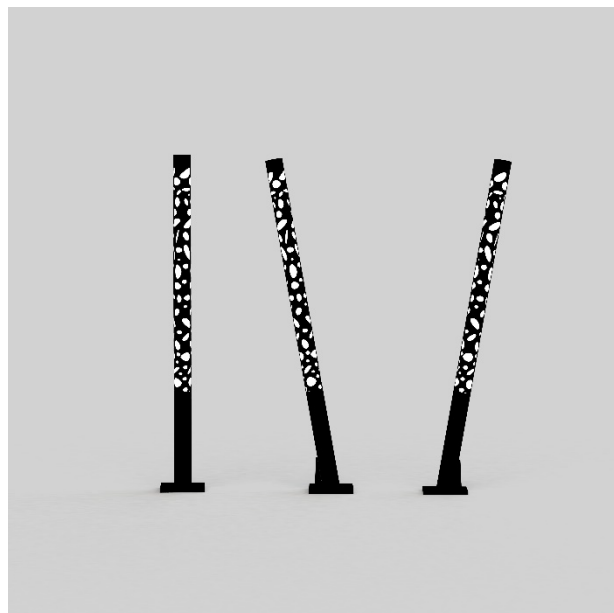

**CUSTOM ARCHITECTURAL LIGHTING**

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9

Fax: 905 457 1115

www.soleracorp.com

--	--	--	--	--	--	--	--	--	--	--

Name	Height	Tilt	Rotation	Light Engine	Color Temp.	Electrical	Mounting	Lens	Options	Finish
YUMI	Specify height (15ft max.)	10 ST	0°	90 W (max)	3000K	UNV HLV	ABT	OPL	SF	BLK
			45		3500K				DM1	BZ
			90°		4000K				DM	WH
			135		5000K				GFR	SG
			180		RGBW				TP/TS	CC
			225						SP10	
			270							
			305							

Notes:

- 3000k - 156 lm/w*
- 3500K - 159 lm/w*
- 4000K - 164 lm/W*
- 5000K - 166 lm/W*
- ST - Straight column
- UNV- Universal voltage (120V - 277V)
- HLV- High Low voltage (347V - 480V)
- ABT- Anchors, Bolts, Template
- OPL- Opal lens
- SF- Single Fuse
- TP/TS- Tamperproof hardware
- DM- 0-10V dimming
- GFR- Ground fault Receptacle
- DM1- 1% Dimming
- SP10- Surge protector up to 10 KV
- BLK- Minitex black
- BZ- Minitex bronze
- WH- Minitex White
- SG- Minitex Silver Gray
- CC- Custom color. (Confirm RAL no. prior to production)

* Does not apply to RGBW