


Date:

Type:

Project:

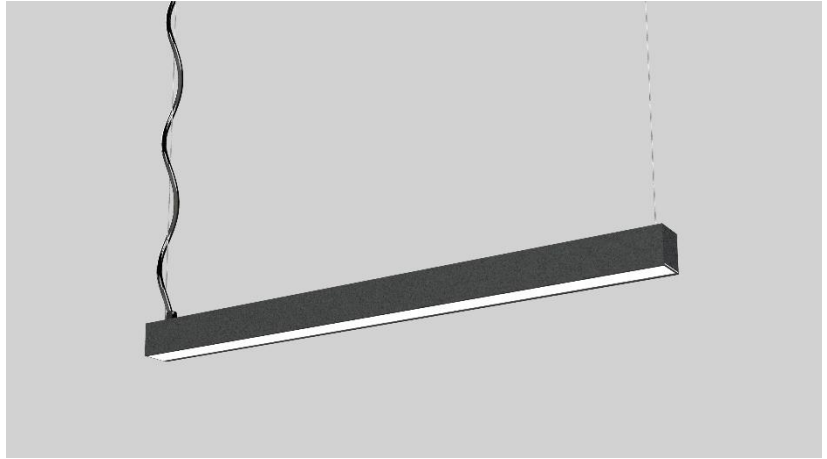

ZRR PENDANT

A narrow rectilinear luminaire that features an inconspicuous modern design. Made from 6061 aluminum extrusion, gives downward illumination with flat lens at the bottom. Can also be installed as wall mounted or surface ceiling mounted. Standard is 3" square and available in various lengths.

Name	Length (in inches)		Lamping	Lumens*	Color Temperature	Electrical			Mounting Options
ZRR	24	24"	24 W LED	4224	5000K			2XP24	Two 24" sturdy pendant stems
	36	36"	36 W LED	6336	4000K	UNV	120-277V	2XAC48	Two 48" aircraft cables
	48	48"	48 W LED	8448	3500K	HLV	347-480V	WM	Wall mounted
	60	60"	60 W LED	10560	3000K			CM	Surface ceiling mounted
	72	72"	72 W LED	12672					

Contact Solera for other mounting options

Lens		Light Pattern		Options			Finishes	
OPL	Flat opal polycarbonate lens (Std)	D	Down light only	DM	0-10V dimming	BL	Black	
CPL	Flat clear polycarbonate lens			DM1	1% dimming	BZ	Bronze	
FL	Flat frosted lens			EM	Emergency driver	WH	White	
				RB	Remote driver	SG	Silver Grey	
				RGBW	Programmable color changing LEDs	BA4	Brushed Aluminum #4	
				RUN	Continuous run, contact Factory	CC	Custom Color	

Contact factory for varying finishes.
[See finishes info on website](#)

*Lumens are based on Max Wattage and 5000K CCT

*Specific IES Files available upon request


Std – Standard Offering

ZRR- _____


Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

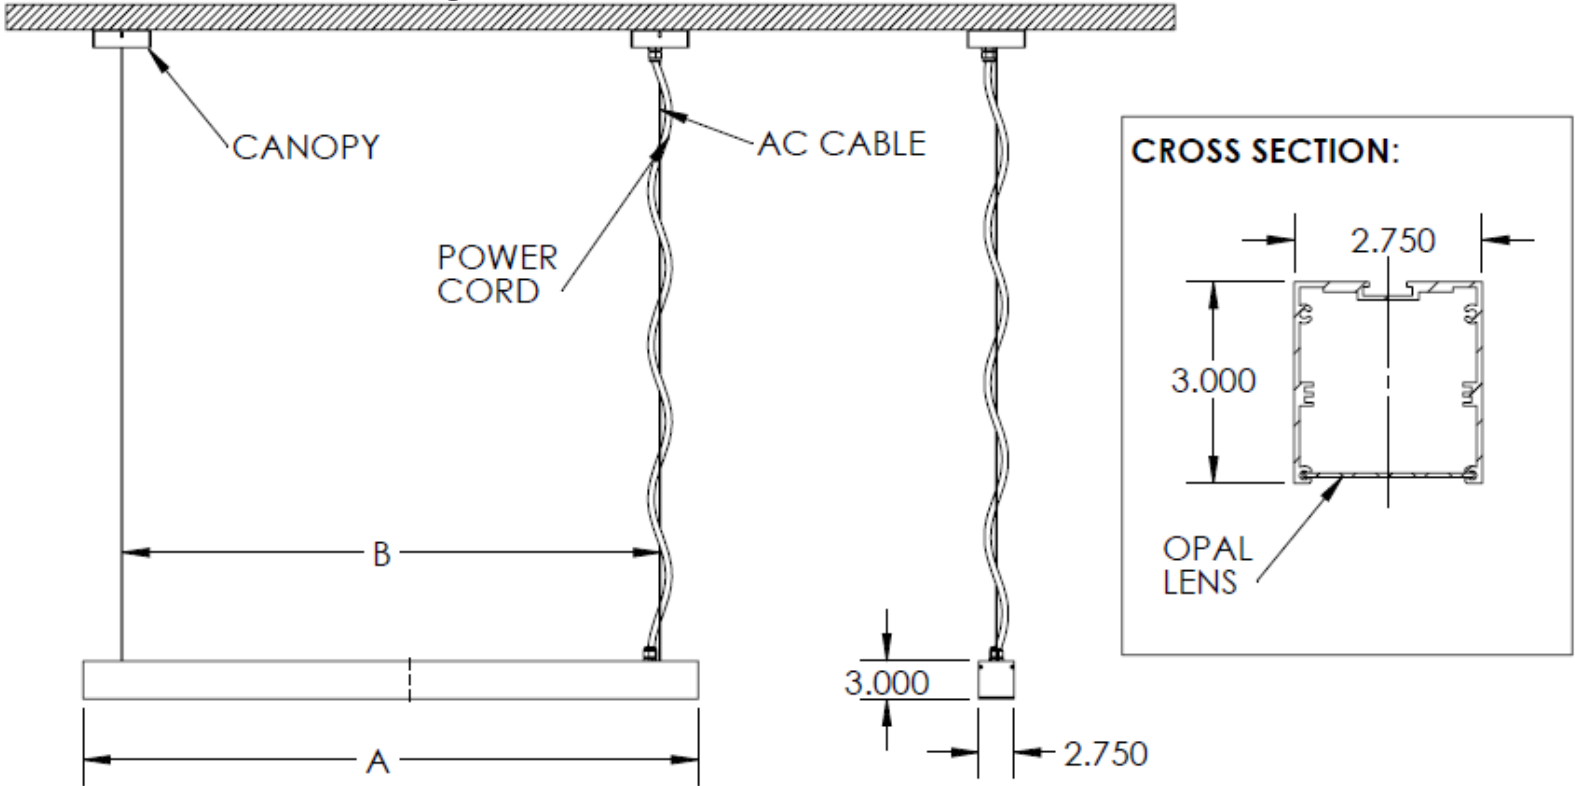

MOUNTING OPTIONS:

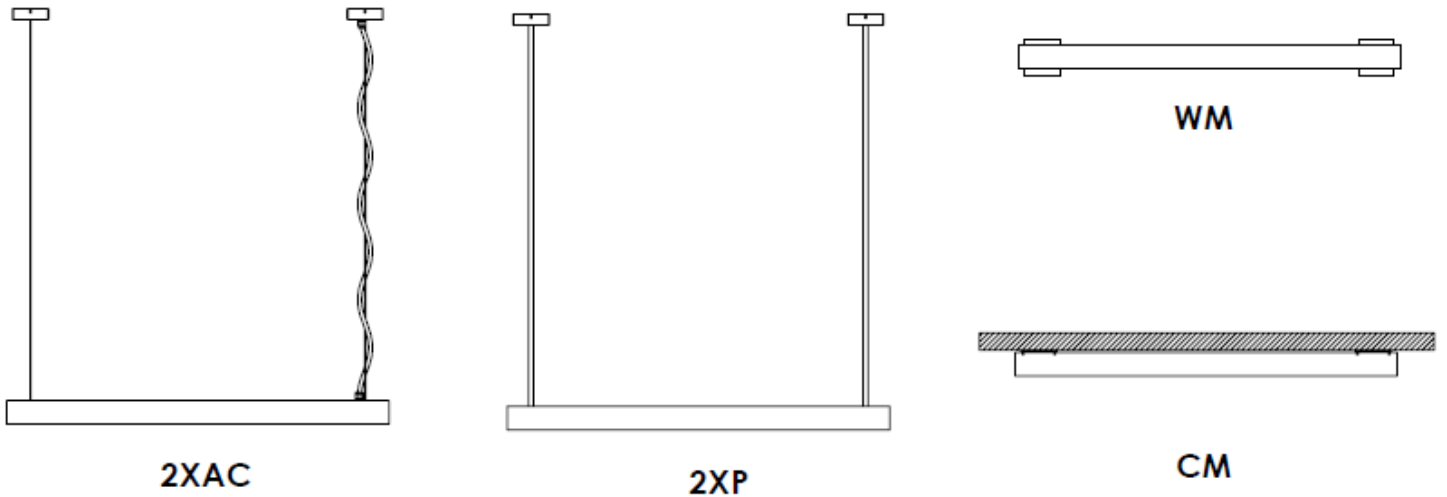

FIXTURE	DIM "A" (LENGTH)	DIM "B" (MOUNTING POINT)
ZRR-24	24.00	18.00
ZRR-36	36.00	30.00
ZRR-48	48.00	42.00
ZRR-60	60.00	54.00
ZRR-72	72.00	66.00