



Date
Quote #
Project Name
Туре

2SBK - Wall Mount

Description:

Door frame design made of heavy duty aluminum. 2SBK comes with a bi-directional pattern (Up & Down Light). Various beam spreads available such as narrow beam, medium beam, and wide beam.



Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish	
	-	-	-] -	-	-		-	-	
				. —						

Name	Light Engine		Source Lumens(LED)(5000K)	Color Temp		Electrical	
2SBK-6X15	6X15	18W LED/Side	4756	30K	3000K	UNV 120-277V	
2SBK-8X15	8X15	29W LED/Side	6470	35K	3500K	HLV 347-480V	
2SBK-8X18	8X18	40W LED/Side	11500	40K	4000K		
2301/-0710	0.710	HOW ELD/ Sluc	11300	50K	5000K		

		Contact for custom Contact for custom Contact for c		ontact for custom					
	Mounting	Nounting Lens		Light Pattern		Options		Finishes	
WM	Wall mount	CG	Clear glass lens	WB	Wide beam	DM	0-10V dimming	Standard	
								BL	Black
		FG	Frosted glass lens	MB	Medium beam	WL	Wet location	WH	White
		PG	Prismatic glass lens	NB	Narrow beam	PC	Button photocell	SG	Silver Grey
						TP	Tamperproof hardware	BZ	Bronze
						TS	Tamperproof	Custom	
							screws	CC	Custom Color
						RGBW	Programmable color changing LEDs		See website for custom colors. Contact factory for
						AEL	Quartz restrike (relay)		physical samples.
						MEL	Quartz restrike (no relay)		

[•] Lumens are based on max wattage & 5000K CCT




[•] IES files available upon request






Dimensions & Mounting:

Please note that drawings are not to scale.

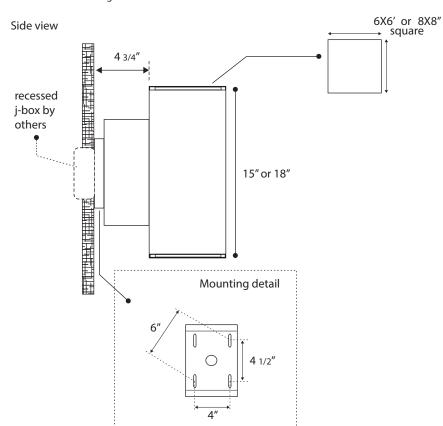



Listing:

Complies to CSA and UL standards.

Polar Graph:

