Solera
CUSTOM ARCHITECTURAL LIGHTING • 120 Walker Dr, Brampton, ON L6T 4G9 CANADA
Toll free: 1 877 765 3722 Fax: 905 457 1115 soleracorp.com

Date: _____

Type: _____

Project: _____



APF-22 PENDANT

APF-22 is a robust luminaire consisting of a spun aluminum fixture housing. Our standard design has the open bottom. The lens option is always offered as silicone sealed for full weather protection. All external hardware is stainless-steel. This fixture is dark sky compliant and gives direct downward illumination.

Construction: Fixture housing is constructed from spun aluminum for durability with weatherproof silicone gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: field-adjustable aircraft cable or field-cuttable sturdy pendant stem. Contact factory for wall or pole mounting options.

Lens: Open bottom is the standard offering. For aesthetics, we offer a variety of lens options.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: down light

Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.


Options: 0-10v 10% dimming, concentric louvers


Finish: black, white, silver grey, bronze, custom color available upon request, inside finishing may differ from outside finishing

Listing: complies with CSA & UL dark sky standards; label for indoor location


Warranty: 5-year limited warranty

APF-22:

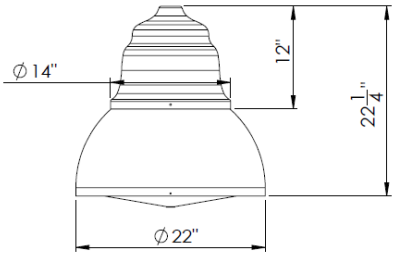

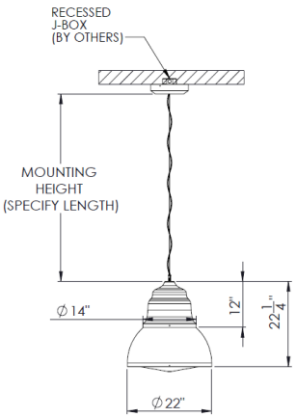

AC-CMB

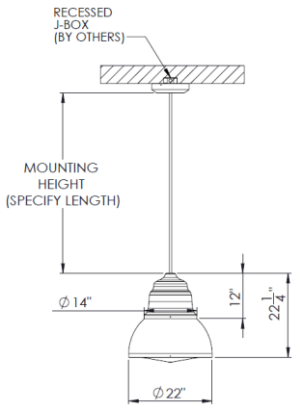

P-CMB

Solera
CUSTOM ARCHITECTURAL LIGHTING • 120 Walker Dr, Brampton, ON L6T 4G9 CANADA
Toll free: 1 877 765 3722 Fax: 905 457 1115 soleracorp.com

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
APF-22	116W LED	3000K	UNV	AC-CMB	OB (std)	D	DM	BL
		3500K	347V	P-CMB	CONL		CLVR	BZ
		4000K			FOAL			WH
		5000K			FSAL			SG
custom wattage available					FRL			CC
					FM			

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- AC-CMB – Field-adjustable aircraft cable connect to ceiling canopy mounted driver
- P-CMB – Field cuttable sturdy pendant stem connect to ceiling canopy mounted driver
- OB – Open bottom (std)
- CONL – Conical lens
- FOAL – Flat opal acrylic lens
- FSAL – Flat satinice lens
- FRL – Frosted bottom lens
- FM – Frosted middle lens
- D – Down light
- DM – 0-10V 10% dimming
- CLVR – Concentric louvers
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)