



Date
Quote #
Project Name
Type



APL - Pole Mount

Description:

APL is made of a one-piece aluminum driver housing and heavy gauge spun aluminum hood with beaded edge. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
APL-22	22 48W LED (Max) 100 MH	6237	30K 3000K	UNV 120-277V
APL-24	24 60W LED (Max) 150 MH	7802	35K 3500K	HLV 347-480V
APL-28	28 84W LED (Max) 400 MH	10425	40K 4000K	TT Tri-Tap(HID)
			50K 5000K	MT Multi-Tap(HID)
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
GN4 Goose neck arm for 4" pole	CG Clear glass lens	TY5 Type V (Std)	SD Step dimming	Standard
GN5 Goose neck arm for 5" pole	SAG Sag glass lens	TY4 Type IV	MS Motion sensor	BL Black
DA4 Decorative straight arm for 4" pole	LMD Lumidome acrylic lens	TY3 Type III	TCO Trespass cut off	WH White
DA5 Decorative straight arm for 5" pole	PD Polycarbonate dome lens	TY2 Type II	PCR Photocell receptacle	SG Silver Grey
GN Goose neck arm	PGB Prismatic Glass Bullet (22")		TP Tamperproof hardware	BZ Bronze
DCA Decorative curved arm			TS Tamperproof screws	Custom
WM1 Single straight arm			PC Button photocell	CC Custom Color
E2B E2 bracket arm (22" only)			NON Non-illuminated neck louvers	See website for custom colors. Contact factory for physical samples.
For better illustration on mounting see (page 2)			ILL Illuminated neck louvers	
			SF Single fuse	
			DCO Dark sky cut off	
			BA Banner arm	






- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

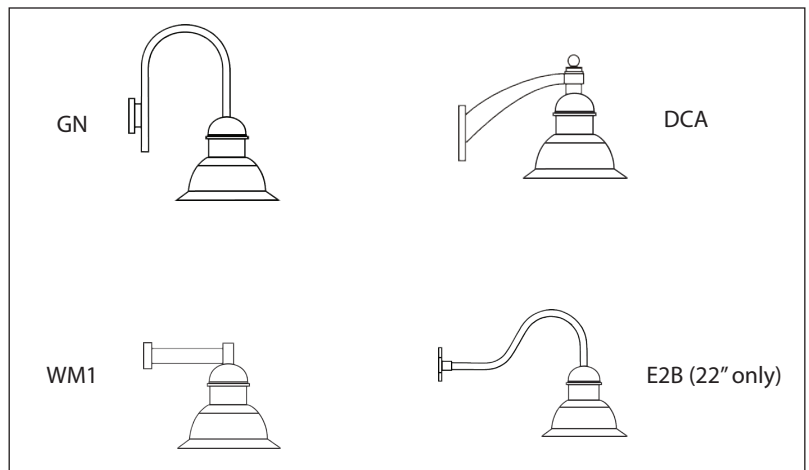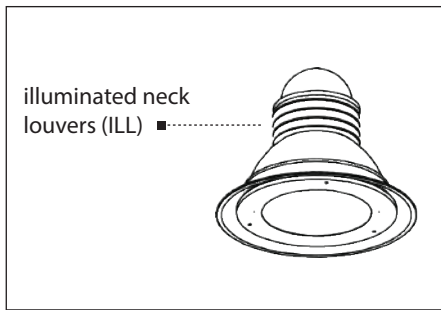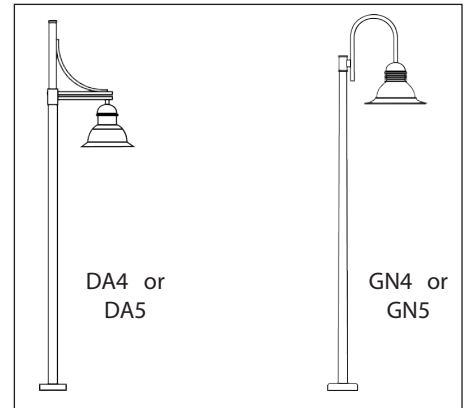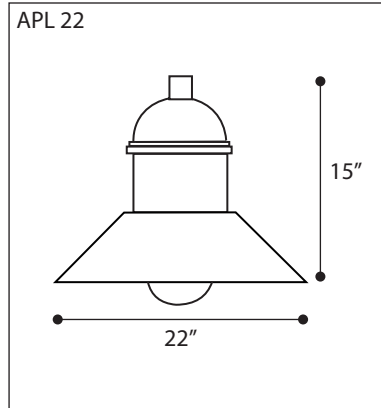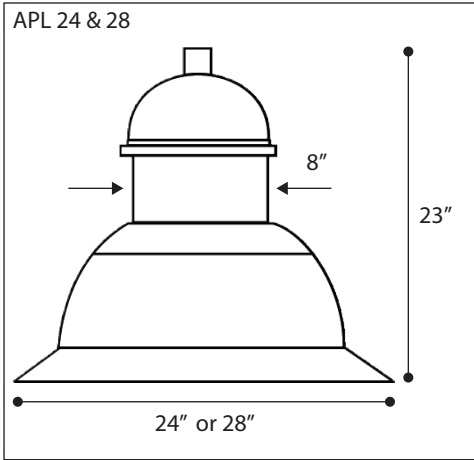

Listing:

Complies to CSA and UL standards.

Polar Graph:

