




Date
Quote #
Project Name
Type

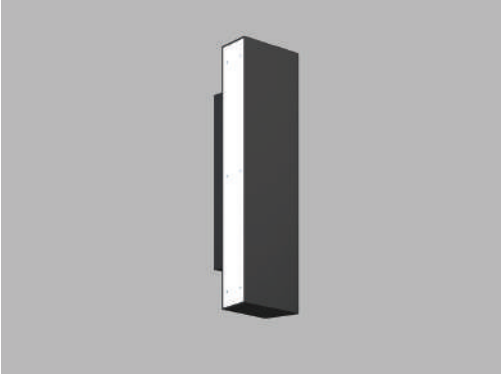

## CEDRO - Wall Mount

### Description:

Constructed of fabricated aluminum and opal acrylic lenses. The lenses are silicone sealed to exclude dust and bugs. All external hardware is stainless steel.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
CEDRO	8W LED (Max)	1409	3000K	UNV 120-277V
	2PLT42		3500K	HLV 347-480V
	2XBIAX42		4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	OAL Opal acrylic lens	S Side light (Std)	DM 0-10V dimming	Standard
		F Front light (Std)	DM1 1% dimming	BL Black
		FS Front & side light	TP Tamperproof hardware	WH White
			TS Tamperproof screws	SG Silver Grey
			SF Single fuse	BZ Bronze
			DB Deep back box	Custom
			RB Remote ballast/driver	CC Custom Color
	RGBW Programmable color changing LEDs		See website for custom colors. Contact factory for physical samples.	


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

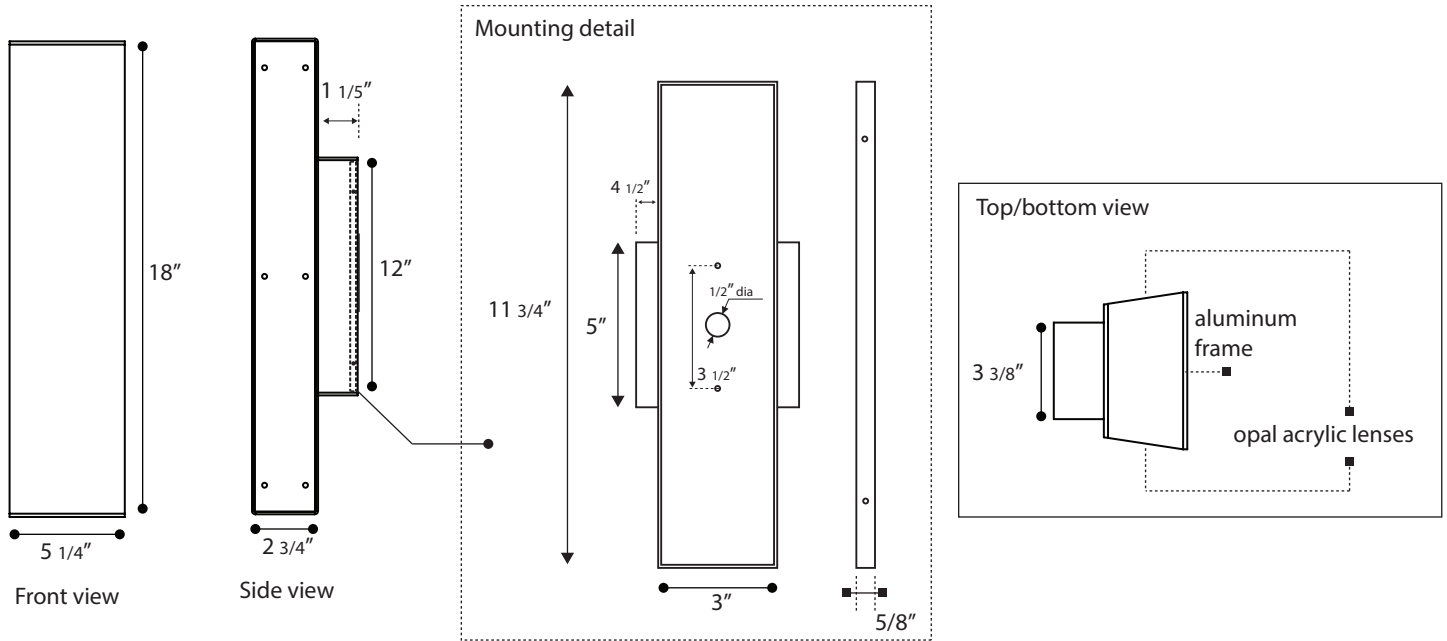

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

