

Date:

Type:

Project:



DOME PENDANT

Made of spun aluminum concave shade. The inner-side is painted white with opal lens to emit a pleasant downward glow. Available in 3 sizes.

Name	Size	Lamping	Lumens*	Color Temp	Electrical		Mounting	
DOME	24	30W	5280	3000K	UNV	120-277V	P36-CMB	36" sturdy stem from ballast canopy
	30	50W	8800	3500K	HLV	347-480V	AC48-CMB	48" aircraft cable from ballast canopy
	36	60W	10680	4000K			3AC-TR	3 aircraft cables converge to single canopy
				5000K			3AC-SPD	3 aircraft cables & spider mount connecting to a hub
Contact for custom								

Lens		Light Pattern		Options			Finishes	
DRL	Drop lens, opal (Std)	D	Down light only (Std)	DM	0-10V Dimming	BL	Black	
SGL	Sag lens, opal convex			RB	Remote driver	BZ	Bronze	
DRP	Drop lens, prismatic K12			SV	Swivel Canopy	WH	White	
				DL	Damp location	SG	Silver Grey	
				TP	Tamperproof hardware & screws			
				RGBW	Programmable color changing LED	BA4	Brushed Aluminum #4	
						CC	Custom Color	

[See finishes info on website](#)



*Lumens are based on Wattage, Type V Distribution, and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

DOME- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

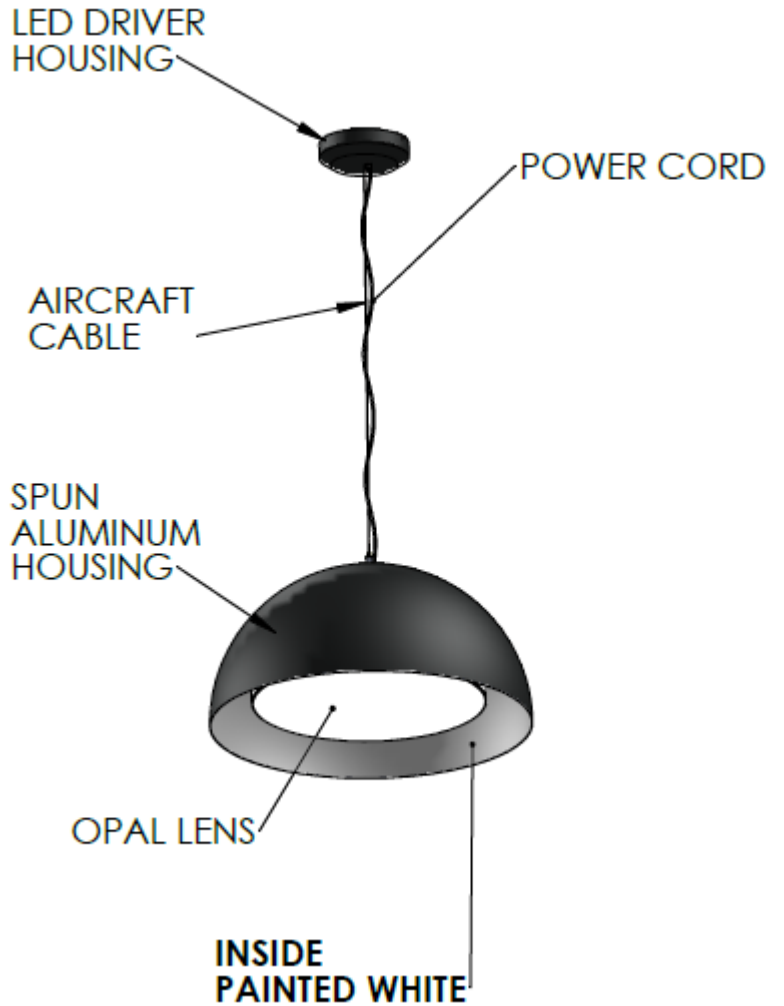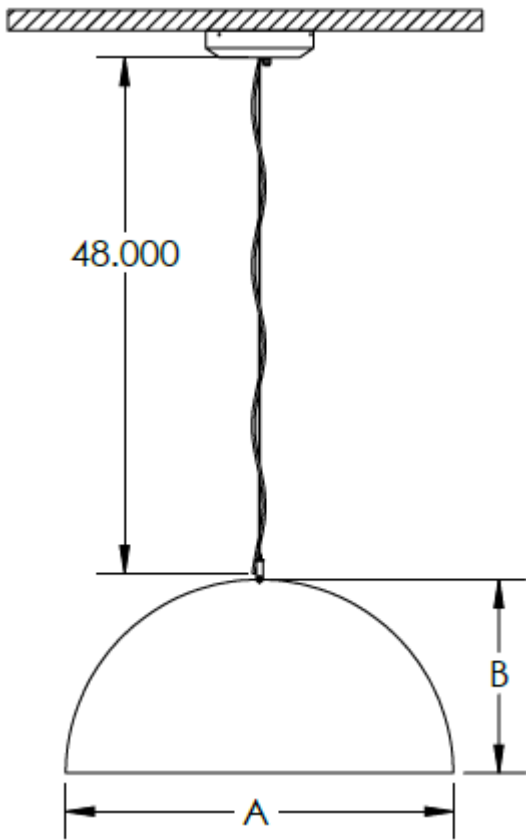

PRODUCT	DIM "A"	DIM "B"
DOME-24	24"	12"
DOME-30	30"	15"
DOME-36	36"	18"

MOUNTING OPTIONS:

