


Date:

Type:

Project:

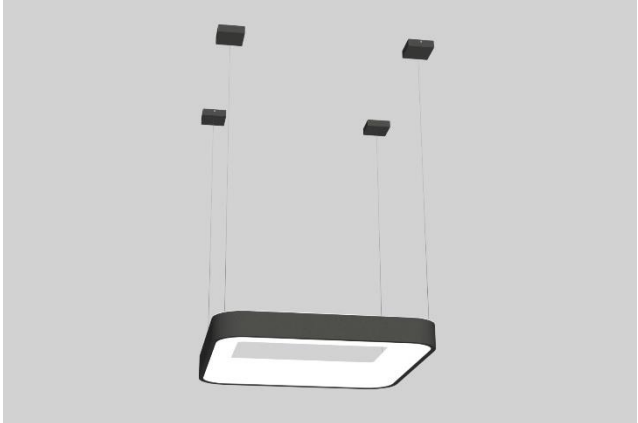

EPO PENDANT

This 4-sided pendant has soft, smooth corners with light source at the inner part of the luminaire emitting directly downwards. Give it a funky twist with custom color, vinyl, or wood grain finishing.

| Name | Size | Lamping | Lumens* | Color Temp | Electrical | | | Mounting |
|------|------|---------|---------|------------|------------|----------|-----------|--|
| EPO | 24 | 35W LED | 3300 | 3000K | UNV | 120-277V | 4AC48 | four 48" aircraft cables with individual square canopies |
| | 36 | 54W LED | 5128 | 3500K | HLV | 347-480V | 4AC-SPD | four aircraft cables & spider mount connecting to hub |
| | 48 | 74W LED | 6958 | 4000K | | | 4AC-TR | four aircraft cables converge to single square canopy |
| | | | 5000K | | | | 4AC-SPD-P | combination of 4 aircraft cables, spider mount, & pendant stem |

| Lens | | Light Pattern | | Options | | | Finishes | |
|------|-------------------------|---------------|---------------------------|---------|---|-----|---------------------|--|
| OAL | Opal acrylic lens (Std) | TY5 | Type V distribution (Std) | DM | 0-10V Dimming | BL | Black | |
| | | | | RB | Remote driver | BZ | Bronze | |
| | | | | 2CC | 2 circuit wiring | WH | White | |
| | | | | VYN | Vinyl or wood grain finish, contact factory for options | SG | Silver Grey | |
| | | | | EM | Emergency battery | | | |
| | | | | RGBW | Programmable color changing LEDs | BA4 | Brushed Aluminum #4 | |
| | | | | | | CC | Custom Color | |

Contact factory for various finishes.
[See finishes info on website](#)


*Lumens are based on Maximum Wattage, Type V Distribution, and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

EPO- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

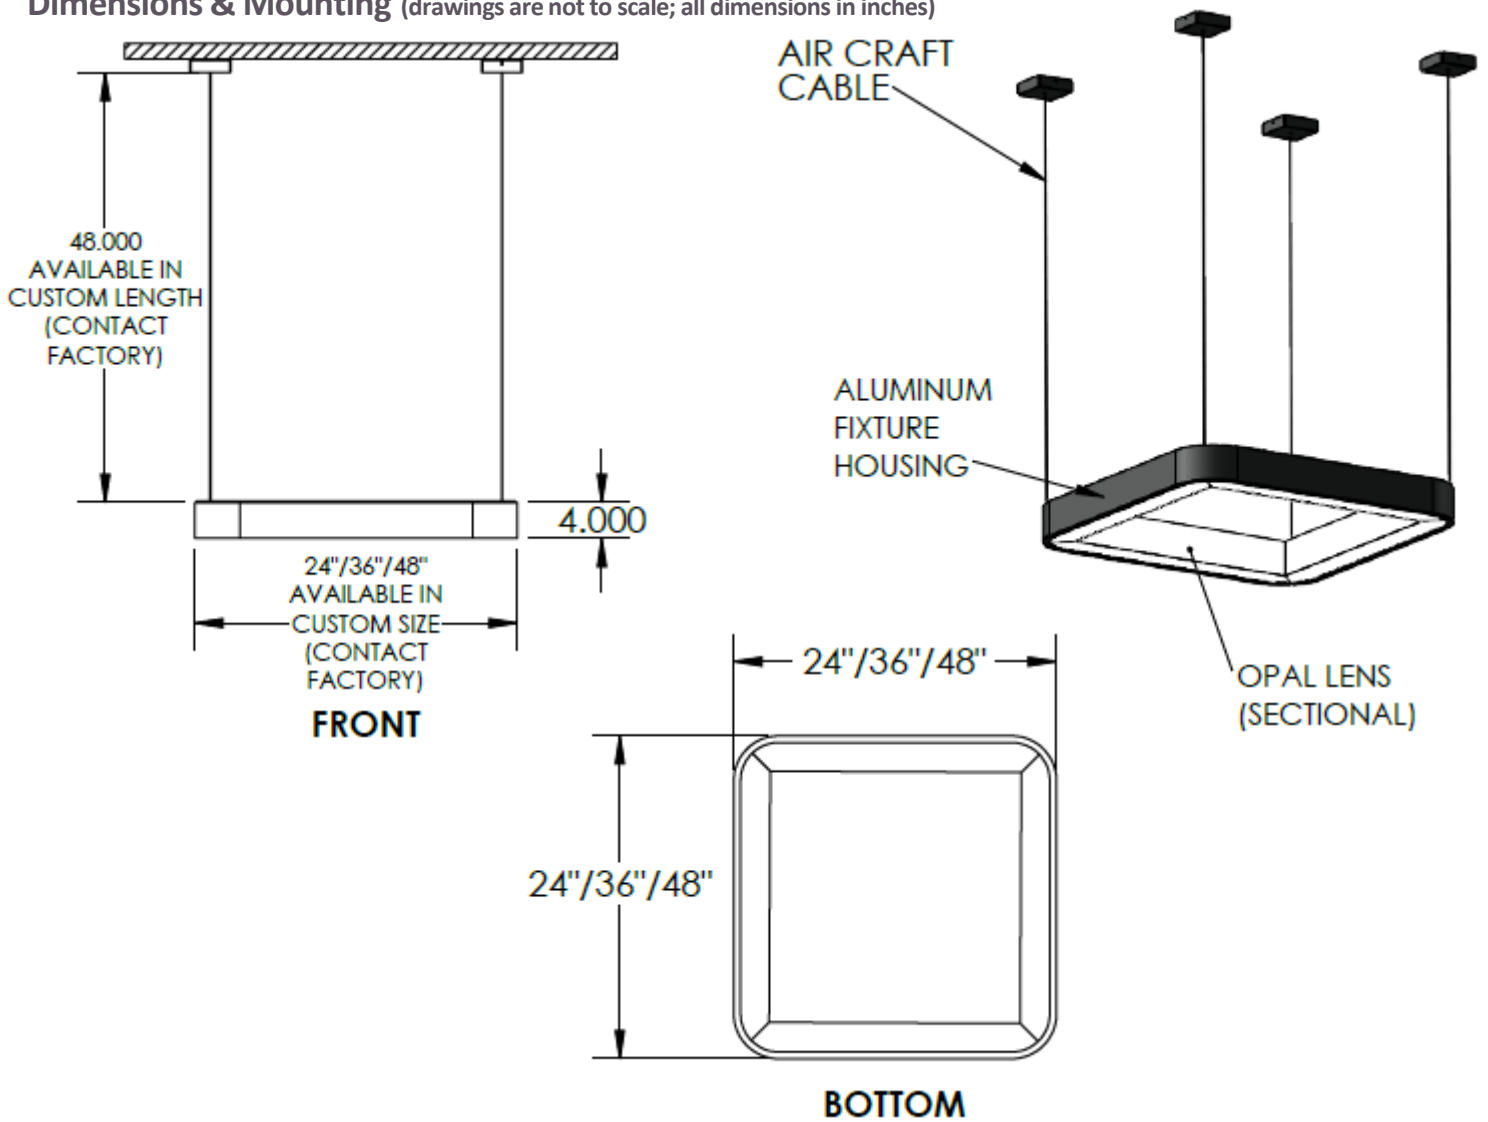

MOUNTING OPTIONS:

